

Rec'd PCT/PTO 31 JUL 2000 PCT #.


~~525 Rec'd PCT/PTO 07 SEP 2000~~NRD
7.31.00

FORM PTO-1300 (REV 12-29-99)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER 801-49US
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			U.S. APPLICATION NO. (if known, see 37 CFR 1.5) 09/623847
INTERNATIONAL APPLICATION NO. PCT/CA99/00073	INTERNATIONAL FILING DATE 5 February 1999	PRIORITY DATE CLAIMED 5 February 1998	
TITLE OF INVENTION MINIMUM TILL SEEDING KNIFE			
APPLICANT(S) FOR DO/EO/US SUMMACH, Terry Emerson & SUMMACH, Bradley T			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1). 4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). 			
Items 11. to 16. below concern document(s) or information included:			
<ol style="list-style-type: none"> 11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 14. <input type="checkbox"/> A substitute specification. 15. <input type="checkbox"/> A change of power of attorney and/or address letter. 16. <input checked="" type="checkbox"/> Other items or information: a) see attached. 			

09/623847 07 SEP 2000

in Fed Ex 8173 9050 4437

533 Rec'd PCT/PTO 07 SEP 2000

U.S. APPLICATION NO. (if known, see 37 CFR 1.51) 09/623847		INTERNATIONAL APPLICATION NO. PCT/CA 99/00073		ATTORNEY'S DOCKET NUMBER 801-49US	
<p>17. <input checked="" type="checkbox"/> The following fees are submitted:</p> <p>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :</p> <p>Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$970.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$840.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$690.00</p> <p>International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$670.00</p> <p>International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$96.00</p> <p style="text-align: right;">ENTER APPROPRIATE BASIC FEE AMOUNT =</p>				<p>CALCULATIONS PTO USE ONLY</p>	
<p>Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).</p>				\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	20 - 20 =	0	X \$18.00	\$	
Independent claims	4 - 3 =	1	X \$78.00	\$ 78.	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$ 918 -	
Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).				\$ 0	
SUBTOTAL =				\$ 918 -	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
TOTAL NATIONAL FEE =				\$	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property . +				\$ 40 -	
TOTAL FEES ENCLOSED =				\$ 958 -	
				Amount to be:	\$
				refunded	\$
				charged	\$
<p>a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>958.00</u> to cover the above fees is enclosed.</p> <p>b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.</p> <p>c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>01-2555</u>. A duplicate copy of this sheet is enclosed.</p>					
<p>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</p>					
<p>SEND ALL CORRESPONDENCE TO:</p> <p>Anthony Asquith 173 Westvale Drive Waterloo, Ontario N2T 1B7 Canada</p>					
				<p></p> <p>SIGNATURE:</p> <p><u>Anthony Asquith</u></p> <p>NAME</p> <p><u>32373</u></p> <p>REGISTRATION NUMBER</p>	

09/13/2000 AGIZAW 00000071 09623847

03 FC:581

40.00 DP

APP 34 AMDT

Rec'd PCT/PTO 07 SEP 2000 17 MARCH 1999 (17.03.99)

Rec'd PCT/PTO 31 JUL 2000
MINIMUM TILL SEEDING KNIFE

PCT/CA 99/00078

09/623847

FIELD OF THE INVENTION

5 The present invention relates to a method of farming, a farm implement and
a knife or knife assembly which may be used as part of no-till or minimum-till
farming practices primarily for placement in the ground of seed and/or
10 fertilizer and other materials. The invention works in all field conditions, and
in particular it operates with minimum soil disturbance in minimum till and
zero till farming practices, better allows passage of trash in such practices,
and does not cause the hair-pinning of crop residue as is often caused by
disc-type openers. As a result, the method provides a simple, reliable and
inexpensive procedure and tool which can be used in all farming practices
15 so that multiple types of equipment are not required by farms for various soil
conditions.

BACKGROUND OF THE INVENTION

20 Important advantages have been found in soil preparation, and seed and
fertilizer delivery in employing no-tilling or minimum tilling methods which
cause minimum disturbance to the soil. This is particularly important in dry
land conditions where the soil is subject to moisture and topsoil loss if
conventional tilling methods are used.

25 It is usually desirable when employing no-till farming practices to disturb the
soil surface as little as possible. The surface will be covered with the residue
from previous crops, and the surface layer will contain old root structure.
This plant material can serve to retain moisture below the surface and to
assist in securing the soil against runoff and erosion. Particularly in

Art 34 AMPT

dry land conditions it is beneficial to retain this covering. Tools currently available to seed into zero till or minimum till conditions have encountered problems.

5 Fertilizing prior to seeding is a method utilized by some farmers. While broadcasting the fertilizer on the surface is a method that does not disturb the surface, it is very inefficient, as much of the fertilizer can be lost due to run off of surface water. Placement of fertilizer at a level well below the level that seed will be place has been utilized. Tilling and fertilizing is disclosed in
10 Great Britain patent No. 1,574,412 issued to Ede in 1980. In that prior art device an angled tilling blade for deeply penetrating the soil is shown with a central duct and a number of separated orifices for providing fertilizer in vertically separated bands. To maintain those desirable characteristics of the surface structure in zero till conditions major surface disturbance is not
15 acceptable.

Zero till seeding devices have been developed to deposit high concentration bands of fertilizer in furrows. If the seed is placed in close proximity to a high concentration of fertilizer, burning of the newly germinated plant will result. To avoid this one technique has been to separate the seeds by a soil layer from the fertilizer.
20

In United States patent No. 5,396,851 issued to Beaujot in 1995 fertilizer is deposited by a first vertical blade which cuts a deeper furrow. A second
25 blade cuts a second furrow in which to deposit seed. Other devices such as disclosed in United States patent No. 4,798,151 issued to Rodrigues in 1989 form a deep fertilizer furrow, and a shallower shelf above the fertilizer on which to plant the seed. In both cases, to minimize soil disturbance only a narrow furrow is cut.
30

It is known to prepare soil when using traditional tilling methods to cut out weed growth prior to or at the time of a seeding operation.

US patent No. 1,085,825 issued in 1914 to Rubarth discloses a subsurface tilling blade for use with a traditional turning plowshare. The tilling blade is curved to angle the cut and includes a horizontal blade on the opposite side. The blades are shown to include an arrangement in overlapping fashion to cut the full width of the subsurface to remove weeds and old growth. Seeding and fertilizing are separate operations.

US patent No. 5,005,497 issued in 1991 to Kolskog discloses a deep banding knife for delivering seed and fertilizer with an additional transverse rod for disrupting weed growth. The banding knife makes a substantially vertical cut in the soil. The rod disrupts the subsoil to loosen soil and cut weeds. The transverse rods can be arranged in parallel to remove weeds completely.

Adaptations of these concepts have been used for deep placement of fertilizer in fully tilled row-crop situations.

In traditional zero till farming practice, no till furrows are separated by undisturbed areas of soil and weeds. Typically a herbicide application is necessary to control weeds which would otherwise compete with the crop growth and possibly contaminate the harvest. Herbicide is an expensive additional operation.

A further problem encountered by seeding implements particularly in zero till conditions is the accumulation of trash during seeding which impairs their operation. Many devices for seeding in zero till conditions provide a blade which penetrates the soil substantially vertically. Trash gathers around the blade and is dragged with the device. This can impair operation. It also

removes the desired moisture retaining cover. In an effort to combat this problem the Beaujot patent discussed above is adapted to lift over obstacles, such as crop stubble, interrupting seeding. Such a technique reduces trash accumulation, but reduces seeding efficiency.

5

A deep sowing tool has been disclosed for rice seeding in relatively wet conditions in USSR patent No. 372,962 issued in 1973 using a tilling blade and deep seed delivery to cover seeds and to reduce the need to water. This is not suitable for zero tilling, as tilling using this tool is deep in order to cause deep soil aeration. The blade of this prior art design penetrates the soil essentially vertically, with an angled blade portion cutting more deeply. The blade portion of this design would also be subject to accumulation of trash.

10

15

Significant soil disruption occurs as vertical furrow parting tools are drawn through surface soils at relatively high velocity, especially in high trash conditions or with unprepared soils. Additional energy is imparted to the soil, throwing and turning the soil.

20

It is desired for minimum soil disruption to pass through the soil surface and any trash cleanly without undue lifting or turning of the soil. While disk openers have the ability to cut through most trash, some straw will not cut easily, and is pushed into the furrow, a result commonly called hairpinning. This can displace seeds, as well as drying out the seed bed. As well, effective no-till disc opener designs are relatively expensive.

25

30

The prior art fails to provide teaching to or a suggestion of any method or device for operation in zero or min-till conditions which provides tilling and/or seeding, fertilizing or weed clearing in a single pass without significantly disrupting the soil or the order of the soil structure and avoid

ART 34 AMDT

hairpinning. It is desired to provide the advantages of tilling seeding and weed clearing without trash accumulation.

5 SUMMARY OF THE INVENTION

10

15

20

25

30

The invention provides a ground opening knife for use in no-till or minimum-till farming operations primarily in conjunction with seed and/or fertilizer placement adjacent a soil cut-line generally in the direction of travel comprising connection means adapted to mount the knife on a farm implement, and a blade comprising a lower portion, said lower portion adapted to open the soil along the direction of travel, said lower portion adapted to extend into the soil but no more than 6 inches measured vertically, said lower portion adapted to be oriented in a direction having a 1st component of between 30 and 60 degrees below horizontal in a plane transverse to the said direction of travel, and a 2nd component forward in the direction of travel.

The knife may include an upper portion adjacent said lower portion adapted to extend away from the surface of the soil and is adapted to pass through materials or residue on the surface of the soil or associated with the passage of the knife through the soil.

The knife way also include an extension extending substantially laterally from said lower portion and provides support for material delivery tubes at various locations along the blade and extension.

The knife may also include in extension to form a secondary furrow adjacent the said lower portion intermediate the surface of the soil and the lowermost

end of the said blade and may include an extension of said leading edge generally forward in the direction of travel.

The invention also provides a method of no-till or minimum-till farming operation primarily in conjunction with seed and/or fertilizer placement adjacent a soil cut-line aligned generally in the direction of travel comprising forming a furrow in the soil extending from said soil cut-line no more than 6" into the soil measured vertically, and forming the said furrow by cutting the soil along a direction having a 1st component of between 30 and 60 degrees below horizontal in a plane transverse to the said direction of travel, and a 2nd component forward in the direction of travel.

The method substantially minimizes any disturbance of the cut soil either above the said furrow or below it or both whether distribution of particulate or other materials is included at the same time within the furrow being formed.

The invention also provides a no-till or minimum-till farm implement primarily for use in conjunction with cultivation or materials placement adjacent a plurality of soil cut-lines generally parallel and in the direction of travel comprising a support frame structure, a plurality of around opening knives attached to said support structure, spaced from each other in a direction transverse to the direction of travel of the implement and each adapted to cut the soil along adjacent ones of said cut-lines, each said knife having a blade comprising a lower portion, said lower portion adapted to open the soil along the direction of travel, said lower portion adapted to extend into the soil but no more than 6 inches measured vertically between the surface of the soil and the lowermost extremity of said blade, said lower portion adapted to be oriented in a direction having a 1st component of

between 30 and 60 degrees below horizontal in a plane transverse to the said direction of travel, and a 2nd substantial component forward in the direction of travel.

5 The farm implement may include an extension of the blade extending laterally across a substantial portion of said spacing between adjacent said cut-lines when viewed in plan view.

10 The invention will be more clearly understood to those skilled in the art with the following detailed description of preferred embodiments with reference to the following draftings in which:

BRIEF DESCRIPTION OF THE FIGURES

15 Figure 1 is a plan view of a single knife according to the present invention; Figure 2 is a side view of the embodiment of Figure 1;

Figure 3 is a front view of the embodiment of Figure 1;

Figure 4 is a plan view of a further embodiment according to the present invention;

20 Figure 5 is a side view of the embodiment of Figure 4;

Figure 6 is a front view of the embodiment of Figure 4;

Figure 7 is an isometric view of the embodiment of Figure 4 arranged on an implement for operation; and

25 Figures 8-1 through 8-3 are front, top and side elevations respectively of another embodiment of the invention adapted for double shooting of materials in seeding.

AMT 34 AMDT

Like references are used throughout to designate like elements.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

5 The preferred embodiment of the single knife of the present invention is as shown generally at 10 in Figures 1-3. In Figure 1 arrow designated 1 shows the direction of travel of the knife through the soil when working.

10 As shown in Figure 7 the knife 10 is typically attached to a cultivator-type frame or implement generally indicated at 2 in Figure 7 to be towed by a tractor in a direction of travel 1 primarily in cooperation with a tow-between, or tow-behind seed supply carrier (not shown) having a repository of seed, fertilizer or other material and fluid passages for connection with the knife 10. The frame 1 is shown in general online only.

15 The knife 10 includes a shank 12 which serves as a connection for mounting the knife 10 selectively on the implement in a known fashion (as at 3 in Figure 7). As shown in Figure 7 an appropriate spacing 4 for seeding or tilling operations will be selected, determining the number and spacing of knives 10 mounted across the width of the implement. The shank 12 preferably has a pair of holes 13 for mounting bolts or the mounting could be provided in any conventional manner such as a knock-on taper mounting system or other known mounting means.

20 Knife 10 includes a blade 14 formed to penetrate the soil along a soil cut-line 11 oriented in the direction of travel. Penetration of the soil occurs at an angle A which has both substantial lateral (A1) and forward (A2) components of approximately 35 - 55 degrees to the surface 5 of the soil to be tilled. Preferably each of lateral and forward components A1 and A2

30

respectively is 45 degrees. Soil penetration is by the lower portion of the blade as at 6 in Figure 3 and is no more than 6 inches, consistent with minimum till or no till farming practices.

- 5 The lateral component A1 of angle A determines the final angle of the furrow cut into the soil. The angled furrow allows seed to be planted ensuring soil cover.

- 10 The blade is also angled significantly forwardly by component A2 of angle A. Preferably lower end 17 of the cutting edge 16 is significantly in advance of the upper end 15 of the cutting edge 16. Deeper soil is cut and lifted in advance of cutting the surface soil allowing the surface to be cut along cut-line 11 more easily and without undue lateral disruption. Vertical motion is limited. The forward component of angle A of the blade cuts through the surface and trash layers last without accumulating trash on the knife 10. Leading edge 16 is preferably continuous from its lower end 17 to its upper end 15.

- 20 The blade 14 has a leading cutting edge 16 and a pair of opposing angled surfaces 18a and 18b which form a wedge shaped profile. The profile shape is determined by the furrow opening required. Edge 16 may be in 2 parts, 1 below the surface and another above but preferably extends continuously above the surface sufficient to move trash and other materials aside without accumulation. Also preferably it is formed aligned with the leading edge of the lower portion of the blade.

25 Preferably surface 18b is inclined slightly from the horizontal to avoid sliding contact with the soil below the blade 14 and minimize soil disturbance below the cut.

30

Also preferably, the rear surface of blade 14 is also angled forwardly and downwardly so as to assist in the creation of a small temporary cavity behind the blade as it travels through the soil.

5 The overall effect is to provide a method and knife whereby primarily vertical motion is imparted to the soil to permit the blade 14 passage and then a return substantially vertical motion is permitted whereby the soil may return to its approximate original location.

10 Adjacent the trailing surface 20 of the blade 14 a conduit 22 may be secured for delivering seeds or other material.

15 The conduit 22 may have an outlet 24 near the lower end 17 of the blade 14 as shown in Figures 1 and 2, and as a result the outlet 24 is adjacent the lowest area of the furrow cut by the blade 14. The seed delivery conduit 22 is protected from damage as the blade 14 is advanced through the soil by blade body 14. The outlet 24 is also shielded from becoming clogged with earth by this arrangement.

20 Additional conduits along the blade for fertilizer, herbicide or other materials may be similarly located (not shown in Figures 1-3).

25 The preferred method provides the steps of forming an angled no-till or minimum till furrow by a knife which furrow cutting motion has both a substantial forward and a substantial lateral component both above and below the ground to a depth of 6 inches.

30 In a preferred method, seed and fertilizer are scattered from adjacent outlets in a pattern across the width of the furrow. The outlets may be spaced apart to appropriate depths and separation, for example, placing a fertilizer outlet

at the lowest end of the blade for deepest application and a seed outlet spaced above it on the angled blade 14.

Another preferred embodiment is shown in Figures 8 in which Figure 8-1 shows the embodiment in a front view, Figure 8-2 in a plan view and Figure 8-3 is a side elevation.

In Figures 8 the embodiment is shown in conjunction with the knife and method shown in Figures 1-3 with a additional double shoot extension 8. Leading edge 16 of the lower portion 7 is extended further forward and downward as best depicted in Figure 8-3. As seen in the front view of Figure 8-1 this will provide a secondary furrow or ledge intermediate the surface of the soil 5 and the lower end 17. Figures 8 show this embodiment as forming a v-shaped furrow particularly suited to the deposit of particulate material such as seed which would be retained in this groove. The extension 8 could have other shapes to form a ledge or other shape as required.

As extension 8 depends from lower surface 18b, extension 6 may be provided with a delivery conduit 19.

This double shoot method forms a seed or other material positioning shelf or secondary furrow within the angled furrow with a specific spacing from the lowermost extremity.

An alternate embodiment of the invention is shown in Figures 4-6. The knife 10 includes a blade 14 as described above. The knife 10 further includes an extension blade 30 that extends substantially horizontally from the blade 14 preferably at its lowermost end 17. The extension blade 30 has a leading cutting edge 36, which preferable forms a continuation of or 3rd

part of leading edge 16. Edge 36 is substantially horizontal and is preferably oriented transverse to the direction of travel. The cutting edge 36 is formed between an upper surface 32 angled upwardly and rearwardly and a lower surface 33 which is substantially horizontal. The lower blade surface 33 may preferably be angled to the rear, upwardly about 2 degrees, or notched, to reduce drag.

The extension blade 30 increases the operating width of the knife 10 as shown in Figure 7. This extends the cultivating and/or planting area for greater seed bed utilization, or may be selected for greater spacing between seed planting while still effectively cutting existing plant roots to condition more of the width of soil. The extension blade 30 may be of varying width for different spacing considerations.

Outlets for seed, fertilizer and other additives may be spaced apart in or on the extension blade 30 to form distinct rows (not shown) and are preferably adjacent the rear surface thereof or may provide for broadcast across the width of extension 30.

Outlets may also be placed at the corner between the angled blade 14 and the extension 30 as at 24 on Figures 4 and 5, or higher on the angled blade 14, for vertical separation, such as for herbicide application nearer the soil surface.

As seen in Figure 7, a plurality of knives 10 shown including extension 30 on an implement frame in outline may be arranged spaced in continuous or overlapping arrangement on the implement 2 so that the full width of soil is conditioned. The number and spacing will depend on the crop and planting conditions. Suitable placement of outlets along extension 30 would result in a generally scattered seed and fertilizer delivery in behind each knife 10. In

this case the complete width of soil could be planted. Roots in the complete width of soil may also be cut by the blade extension without being dragged and fouling the knife 10.

- 5 The extension blade 30 may be positioned to travel under the path of the angled blade 14 of the adjacent knife 10.

Knives 10 are mounted to an implement or cultivator frame as in Figure 7. A wing section of the frame is illustrated in outline form. Additional central and wing sections are not shown. The frame is carried on load bearing wheels (not shown) which support the frame in a raised position for travel and in operative position.

Adjustment of the height of the frame in a known fashion accurately controls furrow depth. Depths may typically range from 1/2 inch to 4 inches or up to 6 inches. Alternatively, a ground following linkage may be used to attach each knife to the frame, with the depth being controlled by a wheel attached to each knife assembly.

In use the knives 10 arranged in parallel fashion on an implement or overlapping arrangement on an angled draw bar are drawn by a tractor together with a seed carrier provided with reservoirs of seed and fertilizer material and a fluid delivery system operatively connected with the conduits 22 on the knives 10. The frame 2 is advanced with the leading cutting edges 16 and, optionally, 36 facing in the direction of travel 1. The deposit of material is controlled to the speed of advance at the tractor in a known fashion.

The knife 10 will not normally produce overlapping furrows without the blade extension 30 being present, or being long enough to result in an

overlapped cut with adjacent rows as the placement would be too close. Weed control with herbicides is necessary in those circumstances.

As seeding occurs, fertilizer can be added simultaneously in controlled concentration, or at a desired depth or spacing from the seed. Fertilizer is more efficiently used without loss from runoff. Further fertilizer is placed to be available to the crop and not at the surface for weeds. A subsurface delivery of fertilizer is particularly effective if gaseous fertilizer, such as ammonia, is used. The knife provides a variety of options for placement with minimum adjustment and cost.

It may be desired to seed an area progressively in time for continuous harvest. Or with different additives, or with different crop. Since the process is a complete single pass operation, each seeding will include complete weeding and fertilizing more accurately than if separate steps are made which might leave areas untouched.

The invention may also be used as a light tilling tool for minimum soil disturbance without seeding or fertilizer outlets. This would cut weeds and provide minimum soil aeration. The knife advantageously does not turn the soil which would incorporate weed seeds from the surface into the soil to germinate.

Additional embodiments of the present invention will be apparent to persons of skill in the art.

SUBSTITUTE SHEET

Fig 9 is a plan view of an agricultural implement, for planting seeds, which incorporates the seeding knives of the invention;

Fig 10 is a horizontal front elevation of an angled seeding knife, in use;

Fig 11 is a side elevation of the knife of Fig 10, from the left side in Fig 10, and Fig 11 includes a cross-section on the line X-X of Fig 10;

Fig 12 is a rear elevation of knife of Fig 10;

Fig 13 is a right side elevation of the knife of Fig 10;

Fig 14 is a cross-section of a blade of the knife of Fig 10, the cross-section being taken in a plane at right angles to a knife-edge of the blade;

Fig 15 is a front elevation corresponding to Fig 10 of another angled seeding knife;

Figs 16,17,18 are further elevations of the knife of Fig 15;

Fig 19 is a pictorial elevation of a replaceable tip, of the knife of Fig 15;

Fig 20 is an elevation of the body of the knife of Fig 15, and is shaded to show the configuration thereof.

Fig 9 is a plan-view diagram of an implement 120 which carries thirty-five angled-knife seeders 123 in four rows. The implement 120 has a centre section 124, and two hinged wings 125. The wings 125 can be folded upwards for road-transport and storage of the implement. The centre section 124 includes a hitching means 126 whereby the implement can be towed by a tractor.

It will be noted that some of the angled-knife seeders 123 slope to the left, and some to the right. Thus, there is no, or only a small, net sideways force on the implement. The left seeders and the right seeders are kept separate, in banks, since the configuration of the seeders is not suitable for close-pitched left-right mountings thereof.

Press-wheels 127 are provided, one in-line behind each seeder, to roll over, and to close the ground, after the seeds have been deposited by the seeders.

1 The seeders are attached each to a respective mounting bar 128, which is suspended
2 from the frame 129 of the implement, the suspension means including the usual break-
3 back-spring mountings 130.

4
5 Fig 10 is a front view of one of the angled-knife seeders 123. Fig 10 shows the seeder
6 being dragged forwards, i.e out of the paper, as indicated by the arrow 132. Fig 11 is a
7 lateral or side elevation, showing the seeder being drawn through the ground, and
8 moving to the left as indicated by arrow 132. Fig 11 includes an inset cross-section,
9 taken on line X-X of Fig 10; it is emphasized that line X-X is vertical, i.e the inset cross-
10 section in Fig 11 lies in a vertical plane.

11
12 As shown from the front view, Fig 10, the seeder or knife 123 has an angled blade 134,
13 which extends down into the ground to a depth, typically, of about 10 cm. The depth
14 is determined by the needs of the type of seeds being planted; planting seeds deeper
15 than 10 cm would be unusual, and 15 cm can be regarded as a maximum planting
16 depth.

17
18 The angled knife cuts an angled slit-opening in the ground, and the seeds are
19 deposited therein. The seeds to be planted are supplied from a hopper on the
20 implement, and are blown along a hose by means of a fan which forces an air flow in
21 the hose. The hoses are of flexible plastic tubing, one for each seeder (the hoses are
22 not shown in Fig 9).

23
24 Each flexible hose is clipped to a respective conduit 135, which is built into the seeder
25 123. The conduit is structurally integrated into the back-side of the angled-knife-blade
26 134, and runs down the back-side 136 of the blade. The conduit ends in a discharge
27 mouth 137, from which the seeds emerge, and fall down into the slit-opening. The
28 discharge mouth 137 is near the bottom of the knife blade, whereby the seeds are
29 deposited more or less at the bottom of the slit opening.

30
31 The conduit 135 is shown in the rear view of the seeder, Fig 12, and in the opposite
32 side-elevational view to Fig 11, Fig 13. The upper end of the conduit terminates at a
33 port 138, into which the flexible hose can be secured.

34

1 The knife blade has an over-surface 139 and an under-surface 140. These surfaces are
2 respective flat planes, which meet at a line, that line being the knife-edge 142. The
3 blade is generally triangular in cross-section, in that the surfaces 139,140 slope back
4 from the knife edge, to a maximum thickness of the blade at the back-side 136 thereof.
5 The conduit 135 is accommodated within the thickness of the back-side of the blade.

6
7 Fig 14 is a cross-section of the blade 134, and shows the dimensions thereof. The Fig
8 14 cross-section is taken in a plane at right angles to the knife-edge. The dimension
9 143 is the distance between the over-surface 139 and the under-surface 140 at the
10 back-side of the blade, which in this case is 32 mm; and dimension 145 is the distance
11 from the knife-edge 142 to a mid-point of the conduit 135, which in this case is 70 mm.
12 The conduit 135 has an internal diameter of 24 mm. The angle between the over-
13 surface 139 and the under-surface 140, in the cross-section at right-angles to the knife-
14 edge, is called the wedge angle 146, which in this case is 25 degrees.

15
16 Not only is the angled blade 134 angled to the side, at a side-slope-angle 147, as
17 shown in Figs 10 and 12, but the blade is also given a forward pitch angle 148, as
18 shown in Figs 11 and 13. In this case, the side-slope angle 147 is 45 degrees. and the
19 forward pitch angle is also 45 degrees.

20
21 The leading knife-edge 142 is positioned such that when the blade is viewed from in
22 front, only the over-surface 139 can be seen. The under-surface 140 is invisible. That is
23 to say, the knife edge is at the lowermost point of every vertical cross-section taken
24 through the blade 134. Thus, the portion of soil that lies in the path of the blade lies in
25 the path of the over-surface 139 of the blade. The over-surface has the wedge angle
26 146, and the soil is therefore driven upwards, by the wedge angle. The uplift travel of
27 the soil is determined by the vertical height 149 of the over-surface 139, as presented to
28 the oncoming soil, which in this case is about 8 cm.

29
30 Fig 15 is a front elevation of another design of angled-knife seeder 150. In this case,
31 the above-ground portion of the seed conduit 152 is positioned to one side of the
32 above-ground shank 153. This location of the conduit provides access for the nuts and
33 bolts which are used at 154 to fix the seeder to the mounting bar 128. However,
34 although access for the nuts and bolts is good, the extra width of the shank 153 means

1 that the shank can be obtrusive, and can cause soil debris created by the passing of
2 the angled blade to hang up; it might be regarded that the wide shank can act like a
3 bulldozer blade.

4
5 A deflector surface 156 is provided, for deflecting soil debris away from the front face of
6 the shank 153. The deflector surface is angled to deflect the debris downwards, and to
7 the side. The nub 157 serves also to break the upward flow of the debris, and to keep
8 the shank 153 clear.

9
10 It may be noted that, in Fig 1, the triangular gusset-surface 159 also was disposed at an
11 angle that included a downwards component, and so the gusset-surface 159 also
12 served to deflect up-flowing debris downwards, and sideways, away from the shank 12
13 of the knife. Thus, the deflector-surface can be on the outside (Fig 15) or the inside
14 (Fig 1) of the angle between the shank and the blade. Providing downward-facing
15 deflector surfaces on both the inside and the outside also is possible, except that the
16 designer should take care that the knife is not weakened thereby, at the transition 160
17 (Fig 15), 162 (Fig 1), between the shank and the angled blade.

18
19 Figs 16,17,18 are other views of the knife of Fig 15. It will be noted that this knife
20 includes a separable and replaceable tip 163. The tip is shown separately in Fig 19.
21 Fig 20 is a shaded view of the back of the body 164 of the knife, and shows not only
22 how the conduit in this design is moulded into the shape of the knife, but shows also a
23 spline 165 on the body, which forms the mounting base for the replaceable tip 163.
24 The tip is held to the spline 165 by means of a pin which engages the pin-receiving-
25 hole 167. The spline is prism-shaped, having a triangular cross-section like that of the
26 blade itself, but smaller, and the tip includes a socket that is complementary to the
27 conduit. Once pinned in place, the tip is very securely constrained against all modes of
28 movement relative to the body 164. The pin serves only to keep the tip from falling
29 down the spline, but the force tending to make the tip move in that mode is minimal: all
30 the heavy forces between the tip and the body are supported by the chunky spline 165.

31
32 The conduit 152 continues inside the spline 165. It is important that the seeds are
33 deposited close to the bottom of the cut opening; with the conduit inside the spline,
34 even though the bottom part of the knife comprises the tip, the conduit goes to the

bottom of the opening. (It would be inefficient to cut the opening deeper than the planting depth of the seed, so the discharge mouth of the conduit should be as near the bottom of the knife as possible.) On the other hand, the prudent designer would seek to avoid calling for the manufacture of a (tubular) extension of the conduit in the tip casting. Putting the conduit in the spline puts the discharge mouth of the conduit more or less at the bottom of the trench, even though the knife has a replaceable tip.

It will be noted that the lower extremity 168 of the knife edge 169 on the body 164 is rounded convexly, whereas the upper extremity 172 of the knife edge 170 on the tip 163 includes a tag 173 which is rounded concavely. Thus, debris travelling up the knife edge can readily pass smoothly over the transition between the two knife edges 169,170. The designer should see to it that the knife edges do not contain interruptions, upon which soil-debris could be snagged. Forming the body 164 with a large convex radius is easy from the casting-manufacture standpoint; it is much easier to control the quality of a concavely-curved tag on the tip casting than on the body casting.

The knife edge 170 on the tip 163 can be blunter than the knife edge 169 on the body. The tip operates more deeply, where debris, even if imperfectly cut, tends to be brushed off the knife edge by the pressing passing soil. On the body, the knife edge itself has to do all the cutting of debris and vegetation, with little assistance from the passing soil, since, being shallower, the passing soil might more easily be deflected. It is noted that, if it happened, a hang-up of imperfectly cut material on the knife edge would be quite a serious problem, as it would quickly lead to disruption and disturbance of a large area of soil around the slit opening.

Conventionally, when seeding has been done with seeding knives (as opposed to discs, etc) the seeding knife has been held vertically. When the seeding knife is held at a side-slope-angle, as described herein, the manner in which the soil is opened for receiving the seeds is considerably changed.

When the knife is at a side-slope-angle of about 45 degrees to the horizontal, what happens is that a flap 174 of soil is lifted temporarily by the passing blade 134, and then the flap is lowered gently back after the seeder knife 123 has passed. As a result,

1 the layers of the soil are preserved, during seeding. In other words, it is possible for a
2 farmer to plant seeds without disturbing the stratification of the soil. It may be noted
3 that the press wheels 127 serve to press the flap 174 back down, and assist in the
4 maintenance of stratification: thus the function of the press wheel is more in harmony
5 with the action of the angled blade, than in the case of a press wheel linked with, for
6 example, a non-angled (vertical) seeding knife.

7
8 Maintenance of soil stratification is important in currently-favoured minimum-till farming
9 regimes, because moisture in the layers a few centimetres down is not dissipated; weed
10 seeds on the surface remain on the surface and do not germinate; and stalks and
11 vegetation at the surface remain intact, providing cover and moisture retention. On the
12 other hand, the angled knife, especially when a wing extension is provided below
13 ground, cuts and severs the roots of any vegetation that might be present, whereby
14 weeds and unwanted plant growth are destroyed at the time of planting the seeds. It
15 may be noted that the weeds are destroyed simply by mechanical action. Using
16 herbicide to destroy weeds is expensive and can be dangerous, and has to be done as
17 a preliminary operation from seeding. Under suitable conditions, the underground
18 "reach" of the angled knife can be enough to sever the roots of weeds and other growth
19 not only around the seed openings, but over the whole area of ground between the
20 openings.

21
22 The fact that the flap of soil is pushed upwards by the angled blade does not mean that
23 the soil is compressed: if the soil were pushed downwards or sideways, it would
24 become compressed and perhaps smeared, since there is no where for the deflected
25 soil to go; but when the soil is urged upwards, the soil simply moves upwards. Of
26 course, lifting deeper soil would involve lifting the weight of all the soil above, so lifting
27 without compression only works down to shallow depths. Thus, it would not be
28 possible to lift a flap of soil without compressing it if the soil were more than 10 or 15
29 cm deep. But it is recognised that seed planting is done predominantly at shallower
30 depths than that; and it is recognised that the depths down to which an angled blade
31 can cause the soil to simply lift without being compressed is a suitable depth to enable
32 planting of nearly all types of seeds.

33
34 If the knife were nearly vertical, i.e if the knife were angled over at more than about 60

1 degrees to the horizontal, the lifting action that occurs with the angled knife would
2 become negligible. With the 45-degree angle, most of the movement of the soil that
3 occurs is a riding up of the soil over the front edge of the knife. At 60 degrees, the soil
4 tends to be bulldozed, or chiselled, rather than slit or cut. Insofar as the soil is pushed
5 to the side by the knife, the soil is compressed, and smeared, rather than gently lifted.

6
7 Of course, the knife must emerge from the ground surface, and the very shallow soil
8 around the point of emergence inevitably is lifted too much, and tends to fly away.
9 However, this effect is less disturbing than inserting a vertical chisel into the ground.

10
11 If the knife were more nearly horizontal, this fly-away lifting of the shallow soil might be
12 too much. Besides, if the knife were nearly horizontal, although the knife would still lift
13 the flap of soil, the knife blade would need to be too long in order to get down to the
14 seed planting depth, which would mean that too much soil was being moved for a
15 given planting depth, and which would be poor mechanically.

16
17 Tests have shown that the flap-lifting, stratification-maintaining, advantageous effects of
18 the angled blade are largely lost if the blade is angled (i.e the side-slope-angle) more
19 than about 55 degrees or less than about 35 degrees. 60 degrees and 30 degrees can
20 be regarded as the practical limits. It has been found that the force required to draw
21 the angled blade through the ground is at a minimum when the blade is at about 45
22 degrees. It may be noted that minimum draw force is an indication of minimum ground
23 disturbance, which is what makes for minimum-till agriculture.

24
25 The leading knife-edge of the angled blade should be lowermost in the ground. That is
26 to say, the soil approaching the blade should "see" only the over-surface of the blade.
27 Thus, all the soil that is deflected is deflected upwards. If some of the soil were driven
28 downwards, or horizontally sideways, it would be compressed or smeared, and seeding
29 is most effective and efficient when the seeds are placed on and in soil that has not just
30 been compressed.

31
32 The effective but gentle lifting as desired has been obtained with angled blades where
33 the blade has been so presented that the over-surface has been about 7 cm high,
34 measured in a vertical sense, from the leading knife edge to the back of the over-

1 surface. (The thickness of the blade, measured in a plane at right angles to the leading
2 edge, preferably is between 25 and 45 mm.) The angle between the over-surface of the
3 blade and the under-surface, called the wedge angle, is a key factor in determining the
4 lift of the blade, and good results have been obtained when the wedge angle lies
5 between 20 and 30 degrees.

6
7 Preferably, the over-surface should be a single flat plane over its whole area, but it is
8 recognised that it is the front of the over-surface of the blade that is key to the
9 performance, i.e the front 4 cm of the over-surface contiguous with the knife edge.

10
11 Preferably, the blade is generally triangular as to its cross-sectional shape, the three
12 sides of the triangle being the over-surface, the under-surface, and the back-side of the
13 blade. (The back-side is not, as shown, a flat plane.) It is recognised that triangular is
14 a good shape, in that it leads to a suitable angle for the over-surface of the blade, in
15 order for the over-surface to deflect soil dynamically; also, the bottom face can be easily
16 set to not touch the soil passing-by underneath the blade; also, the thick back-side has
17 to be thick to accommodate the conduit. In short, the triangular shape is a highly
18 efficient shape for performing the soil-moving operations required for seeding, for
19 accommodating the seed conduit, and (not least) is a good shape for providing
20 mechanical strength and rigidity in just the right amounts for the task.

21
22 The designer should see to it that the knife is reasonably short, in the travel direction.
23 Length would just lead to extra drag, and perhaps smearing of the soil. The aim should
24 be to combine efficient use of surfaces and angles to give the smooth lift-then-fall-back
25 movement of the soil, without disturbing the soil, and while maintaining stratification.
26 The designer should see to it that the surfaces are angled enough, and are long
27 enough for that, and of course the knife has to be strong and rigid enough to be struck
28 occasionally by stones etc without being damaged. It is recognised that the angled
29 blade as described herein is a design that handles these conflicting requirements very
30 advantageously.

31
32 The conduit preferably should be in the size range of 15 to 25 mm diameter, for proper
33 seed conveyance. It is recognised that such a size of conduit is well-suited to being
34 located behind the triangular angled blade, as described. The blade surfaces, i.e the

1 over-surface and the under-surface, slope towards the conduit as two simple flat planes,
2 straight from the knife edge.

3
4 As mentioned, the functions of the blade require that the blade be wide enough for its
5 surfaces to be so angled as to be effective; and the blade must also be strong enough;
6 beyond that, the blade should preferably be short. Good results have been obtained
7 when the blade is about 7 cm, or at least between 5 cm and 10 cm, in width, from the
8 knife-edge to a mid-point inside the conduit.

9
10 The blade should have forward pitch to ensure the soil debris can clear, by riding
11 upwards along the knife edge, and out of the soil. It will happen sometimes that some
12 materials are not cut, or are not cut immediately, by the knife edge, and will be piled up
13 ahead of the knife edge, thereby blunting the knife edge. The angled knife should have
14 forward pitch to counteract this. Of course, conventional vertical seeding knives have
15 had forward pitch.

16
17 Preferably, the seed conduit should be integral with the knife unit. If separate, the
18 conduit has to be attached to the knife unit. The conduit should not get in the way, not
19 least above ground, where the conduit can contribute to snagging of soil debris.
20 Therefore, the conduit should lie in line behind the knife. Whilst this is clearly
21 achievable below ground, above ground putting the conduit in line with the knife
22 structure is not so good, because the shank of the knife is attached to the mounting bar
23 by bolts passing through from front to back, and putting the conduit behind the shank
24 would deny access to the bolts/nuts.

25
26 The designer also wants the point of attachment of the flexible seed hose to be high,
27 out of harm's way, and also wants to provide room for a clip for attaching the hose into
28 the conduit. The designer either can put the conduit on a stalk that protrudes out
29 behind the shank (which suits fabricated construction (Fig 2)), or can put the conduit to
30 one side of the shank (which suits casting (Fig 16)). Or, the conduit may be finished
31 lower down, below where the shank is bolted to the mounting bar (Fig 11), although
32 now the flexible hose might be vulnerably close to the ground. Putting the conduit to
33 one side of the shank (Fig 16) gives access to the fixing bolts, but now the front face of
34 shank is thereby widened, so it is even more important to take measures against

1 snagging of the above-ground soil debris on the shank.

2

3 One of the benefits of the angled blade configuration lies in the ability to deposit two
4 types of items simultaneously, e.g seeds and fertiliser, which preferably should be kept
5 spaced apart, upon planting. Simultaneous deposition of both seeds and fertiliser (Figs
6 8) is simplified by the fact that the knife is at an angle, while ensuring same are kept
7 spaced apart. If the knife were vertical, both items would fall to the bottom of the
8 trench, and it would be difficult to keep the items apart. On vertical knife seeders, it is
9 conventional to provide side ledges, for fertiliser; however, the protrusions on the
10 vertical knives that produce such side ledges have also compressed the soil.

11

12 Generally, the farmer wishes to plant as many rows of seeds as possible in a single
13 pass of the seeder implement. In one of the machines described herein, thirty-five
14 seeders are provided on a single implement. The smallest number that might
15 practically be contemplated, would be about eighteen seeders per implement. The
16 large number of seeders is appropriate for single-pass seeding operations at shallow
17 depth, in that a tractor can easily provide the force necessary to draw a large number of
18 shallow seeders through the ground. This may be contrasted with the conventional
19 usage of angled cutters to break up hard-pan sub-soil, i.e caked clay and soil some
20 50cm or more below ground. Sometimes, these deep angled-cutters have been used
21 to prepare ground for seeding, but in that case the seeding has been done separately,
22 as a follow-up seeding operation, using conventional seed drills. (Breaking up hard-pan
23 also can be done for other purposes, e.g to improve drainage.) The conventional
24 large, deep, hard-pan angled-cutters were angled simply in order to cover more ground.
25 They were constructed so as to cause maximum disturbance to the soil, at a large
26 depth; they required large forces to draw them through the ground, so that only a small
27 number, say four or five, could be pulled by a tractor. The use of an angled blade as
28 described herein to lift shallow flaps of soil with minimum disruption, and to lower the
29 soil flap back down without disturbing stratification, makes a clear contrast with the use
30 of deep angled cutters to break up hard-pan. It is emphasized that the gentle,
31 minimum-till, operations described can take place only at shallow depths.

32

33 In the above aspects, the invention is defined by reference to an implement, in which
34 the angled blades are mounted for operation. In another aspect, the invention can be

10

Claims

Claim 1. An agricultural implement, which is arranged for introducing materials into the ground, wherein:

the implement includes a knife having an angled blade;

the implement includes a drawing means, for drawing the angled blade through the ground in a forwards direction;

the angled blade is effective, when drawn through the ground, to create an angled slit-opening in the ground;

the implement includes a conduit for conducting the materials to the angled blade;

the conduit is secured to the angled blade, and is so positioned thereon that, during operation, a discharge mouth of the conduit is located in the ground at a depth below the ground surface, and is so located in relation to the angled blade as to deposit the materials directly behind the angled blade, in the slit-opening created by the angled blade, as the knife is drawn through the ground;

the angled blade is formed with an over-surface and an under-surface, which intersect at a line, and the line defines a knife-edge of the blade;

the implement includes a knife-mounting means;

the knife-mounting means is effective to mount the angled blade at such an orientation and disposition in relation to the ground, during operation of the implement, that:

(a) when viewed from the forwards direction, the knife-edge makes an angle to the horizontal, termed the side-slope-angle, of between 30 and 60 degrees;

and

(b) the angled blade extends down into the ground to a blade-depth of no more than about 15 cm, measured vertically down from the ground surface.

Claim 2. As in claim 1, wherein the blade-depth is no more than about 10 cm.

Claim 3. As in claim 1, wherein the angled blade includes a below-ground portion, which lies wholly below ground, during operation, and the line defining the knife-edge is a straight line, when viewed in front elevation, over substantially the whole of the below-ground portion of the blade.

Claim 4. As in claim 1, wherein the angled blade includes a below-ground portion, which lies wholly below ground during operation, and the line defining the knife-

32 edge is a straight line, when viewed at right angles to the over-surface, over
33 substantially the whole of the below-ground portion of the blade.

34 **Claim 5** As in claim 1, wherein the side-slope-angle is about 45 degrees.

35 **Claim 6** As in claim 5 wherein the side-slope-angle of the blade is constant over
36 substantially the whole of the below-ground portion of the blade.

37 **Claim 7.** As in claim 1, wherein the blade is so mounted that, at a vertical cross-
38 section of the blade, taken below the ground surface, substantially no point in or
39 on the blade at that vertical cross-section is vertically lower in the ground than the
40 knife-edge at that vertical cross-section.

41 **Claim 8.** As in claim 7, wherein the over-surface of the blade is so angled that, when
42 the blade is drawn through the ground, ground-soil in the path of the over-surface
43 is lifted upwards thereby.

44 **Claim 9.** As in claim 1, wherein:
45 the over-surface of the blade includes an upper-edge-surface, which is a portion of the
46 over-surface that:

- 47 (a) is contiguous with the knife-edge;
48 (b) lies between the knife-edge and a line drawn on the over-surface parallel to
49 the knife-edge and 4 cm back from the knife-edge; and
50 (c) lies between the bottom extremity of the knife-edge and the ground surface;
51 the upper-edge-surface is a unitary flat plane;
52 the knife-mounting means is effective to mount the angled blade at such an orientation
53 and disposition of the knife in relation to the ground that a normal to the upper-
54 edge-surface points upwards relative to the horizontal.

55 **Claim 10.** As in claim 1, wherein, when viewed in cross-section of the blade taken in
56 a plane at right angles to the knife-edge, the upper-edge-surface of the blade lies
57 at an angle, termed the wedge-angle of the upper-edge-surface of the blade, of
58 between 14 and 45 degrees, and preferably between 20 and 30 degrees to the
59 horizontal.

60 **Claim 11.** As in claim 10, wherein the wedge-angle of the upper-edge-surface of the
61 blade is about 25 degrees.

62 **Claim 12.** As in claim 10, wherein the wedge-angle of the upper-edge-surface of the
63 blade is substantially constant over a substantial area of the blade, being an area
64 of the blade below the ground surface.

65 **Claim 13.** As in claim 1, wherein, when viewed from the forwards direction, the over-
66 surface of the blade occupies a height, above the knife-edge, of between 6 cm
67 and 10 cm, measured vertically.

68 **Claim 14.** As in claim 1, wherein, when viewed from the forwards direction, the over-
69 surface of the blade occupies a height, above the knife-edge, of between 2.5 cm
70 and 4.5 cm, measured at right angles to the knife-edge.

71 **Claim 15.** As in claim 1, wherein:
72 the under-surface of the blade includes a lower-edge-surface, which is that portion of
73 the under-surface that:
74 (a) is contiguous with the knife-edge;
75 (b) lies between the knife-edge and a line drawn on the under-surface parallel to
76 the knife-edge and 4 cm back from the knife-edge; and
77 (c) lies between the bottom extremity of the knife-edge and the ground surface;
78 the knife-mounting means is effective to mount the angled blade at such an orientation
79 and disposition of the knife in relation to the ground that normals drawn from
80 substantially all points on the lower-edge-surface point downwards.

81 **Claim 16.** As in claim 15, wherein the under-surface is so disposed that, when the
82 knife is viewed in side elevation, during operation, a normal to the under-surface is
83 vertical or points slightly backwards from vertical.

84 **Claim 17.** As in claim 1, wherein the blade, as viewed in cross-section at right angles
85 to the knife-edge, is generally triangular in shape, the three sides of the triangle
86 being the said over-surface, the said under-surface, and a back-side of the blade.

- 87 **Claim 18.** As in claim 17, wherein the distance between the over-surface and the
88 under-surface at or adjacent to the back side of the blade is between 1.5 and
89 4.5 cm, and preferably between 2.5 and 4 cm.
- 90 **Claim 19.** As in claim 17, wherein the triangle is the same, as to size, shape, and
91 orientation, at all below-ground cross-sections at right angles to the knife-edge.
- 92 **Claim 20.** As in claim 1, wherein, over at least the portion of the blade that lies below
93 ground during operation, the conduit is structurally integrated into, or supported
94 upon, a back-side of the blade.
- 95 **Claim 21.** As in claim 20, wherein the blade is so structured that substantially no part
96 of the structure of the blade extends behind the conduit.
- 97 **Claim 22.** As in claim 20, wherein the over-surface and under-surface of the blade are
98 flat planes extending from the knife-edge right back to the conduit.
- 99 **Claim 23.** As in claim 20, wherein the conduit has walls, and the conduit has a
100 diametral dimension, inside the walls thereof, of between 10 mm and 25 mm.
- 101 **Claim 24.** As in claim 20, wherein the back-side of the blade, and the walls of the
102 conduit, lie parallel to the knife-edge, when viewed in front elevation.
- 103 **Claim 25.** As in claim 20, wherein the back-side, and the walls of the conduit, lie
104 parallel to the knife-edge, when viewed at right angles to the over-surface.
- 105 **Claim 26.** As in claim 20, wherein, in a cross-section of the blade taken in a plane at
106 right angles to the knife-edge, the blade measures between 5 cm and 10 cm in
107 width, from the knife-edge to a mid-point inside the conduit.
- 108 **Claim 27.** As in claim 1, wherein the knife-mounting means is effective to mount the
109 angled blade at such an orientation and disposition in relation to the ground,
110 during operation of the implement, that:
111 when viewed in lateral or side elevation, during operation, the knife-edge makes an

112 angle to the horizontal, termed the forward-pitch-angle, of between 30 and 60
113 degrees;
114 the blade slopes forwards in that view, whereby deeper portions of the knife-edge in
115 the ground lie ahead of more shallow portions of the knife-edge.

116 **Claim 28.** As in claim 27, wherein the forward-pitch-angle is 45 degrees.

117 **Claim 29.** As in claim 1, wherein the portion of the knife-edge below ground is
118 smooth and uninterrupted, in the sense that there is substantially nothing on the
119 knife-edge that would snag soil and debris passing upwards along the knife-edge,
120 during operation.

121 **Claim 30.** As in claim 1, wherein:
122 the knife includes an in-ground blade portion, an above-ground shank portion, and an
123 at-ground-surface transition portion;
124 the general shape and disposition of the knife is such that, during operation thereof,
125 soil and debris travelling up the knife-edge towards, and out of, the ground surface
126 is deflected aside from the shank portion.

127 **Claim 31.** As in claim 30, wherein:
128 the at-ground-surface transition portion of the knife is formed with a deflector-surface;
129 the deflector-surface is so orientated upon the knife as to be visible from in front, in a
130 horizontal front elevation, when the knife is operating in the ground;
131 when viewed in a lateral or side elevation of the knife during operation, a normal to the
132 deflector-surface points backwards and downwards;
133 the above-ground shank portion includes a front surface and a rear surface, and left
134 and right side surfaces, and the disposition of the knife is such that, during
135 operation, soil debris travelling up the knife-edge towards the ground surface
136 encounters the deflector-surface upon reaching the ground surface, and is
137 deflected aside by same, and is thereby deflected clear of the front surface of the
138 above-ground shank portion of the knife, and is deflected by same downwards
139 and is thereby at least somewhat inhibited from flying into the air.

140 **Claim 32.** As in claim 31, wherein the knife-edge and the deflector-surface are

141 contiguous, and the knife is so configured that the knife-edge blends smoothly into
142 the deflector-surface without snags or interruptions.

143 **Claim 33.** As in claim 31, wherein:
144 the shank portion and the blade portion lie relatively at an angle, at or near the at-
145 ground-surface transition portion, and the deflector-surface lies on the outside of
146 the angle;
147 on the inside of the angle, the knife is smooth and has a configuration that resists
148 snagging of soil debris.

149 **Claim 34.** As in claim 31, wherein the deflector-surface extends no more than about
150 2 cm below the ground surface.

151 **Claim 35.** As in claim 1, wherein:
152 a frame of the implement includes a seeding-knife-mounting bar;
153 the knife is formed with an above-ground shank-portion, and the knife mounting
154 means includes an operable attachment means whereby the knife can be
155 detachably attached to the seeding-knife-mounting bar;
156 and the conduit is so positioned in relation to the shank-portion as to allow access for
157 operation of the attachment means.

158 **Claim 36.** As in claim 35, wherein:
159 the shank portion includes a front surface and a rear surface, and left and right side
160 surfaces;
161 in front view of the knife, the conduit lies in line with, and behind, the above-ground
162 shank-portion;
163 and the conduit is spaced from the rear surface by a distance that is enough to permit
164 access for operation of the attachment means.

165 **Claim 37.** As in claim 35, wherein:
166 the shank portion includes a front surface and a rear surface, and left and right side
167 surfaces;
168 and the conduit is located at one of the left and right side surfaces of the above-
169 ground shank-portion.

170 **Claim 38.** As in claim 1, wherein the implement includes a seeding hose, of flexible
171 material, and the conduit includes a port, for attachment thereto of the flexible
172 seeding hose.

173 **Claim 39.** As in claim 1, wherein:
174 the knife includes a wing-extension;
175 the wing-extension is formed with an over-surface and an under-surface, which
176 intersect at a line, and the line defines a wing-knife-edge of the wing-extension;
177 the knife includes a wing-mounting-means, which is effective to so mount the wing-
178 extension in relation to the angled blade that:
179 (a) the knife-edge of the blade and the wing-knife-edge meet contiguously, at a
180 point at the bottom of the knife-edge of the blade;
181 (b) the wing-knife-edge extends substantially horizontally from the said point;
182 (c) and the blade is so mounted that, at any vertical cross-section of the wing-
183 extension, substantially no point in or on the wing-extension at that vertical
184 cross-section is vertically lower in the ground than the wing-knife-edge at that
185 vertical cross-section.

186 **Claim 40.** As in claim 39, wherein the overall vertical thickness of the wing extension
187 is no more than 2 cm.

188 **Claim 41.** As in claim 39, wherein the wing-knife-edge forms a horizontal straight line,
189 which in plan view lies at right angles to the forwards direction.

190 **Claim 42.** As in claim 1, wherein:
191 the angled blade includes a promontory, which is effective, when the blade is drawn
192 through the ground, to cut a side ledge in the slit-opening;
193 the implement includes a second conduit for conducting a second material to the
194 angled blade;
195 the second conduit is secured to the angled blade, and is so positioned thereon that,
196 during operation, a discharge mouth of the second conduit is located in the
197 ground at a depth below the ground surface, and is so located in relation to the
198 angled blade as to deposit the second material directly behind the promontory,
199 and onto the side ledge, as the knife is drawn through the ground.

200 **Claim 43.** As in claim 42, wherein:

201 the slit opening as cut by the angled knife blade, and the disposition of the discharge
202 mouth of the conduit, are such that the materials discharged from the conduit fall
203 to the bottom of the slit opening;

204 the side ledge as cut by the promontory, and the disposition of the second conduit,
205 are such that the second materials discharged from the second conduit fall onto
206 the side ledge.

207 **Claim 44.** As in claim 43, wherein the materials are seeds, and the second material is
208 fertiliser.

209 **Claim 45.** As in claim 1, wherein the materials are deposited on soil in the slit
210 opening that has substantially not been compressed by the passage of the angled
211 knife.

212 **Claim 46.** As in claim 44, wherein the second materials are deposited on soil in the
213 side ledge that has substantially not been compressed by the passage of the
214 promontory to the angled knife.

215 **Claim 47.** As in claim 1, wherein the implement includes a means for forcing air to
216 flow through the conduit, whereby particulate materials in the conduit are urged
217 along the conduit, and out of the discharge mouth, by the flow of air.

218 **Claim 48.** As in claim 1, wherein the implement includes an implement-frame, from
219 which the angled blade is suspended, and the drawing means includes a hitching
220 means whereby the implement-frame is hitched to a tractor.

221 **Claim 49.** As in claim 1, wherein a large number of the said knives are mounted on
222 the implement, each angled blade being so mounted as to be oriented and
223 disposed each in the manner as defined in claim 1, the large number being
224 eighteen or more.

225 **Claim 50.** As in claim 49, wherein, when viewed from the forwards direction, a
226 substantial proportion of the large number of knives are angled to the left, and the

227 remainder thereof are angled to the right.

228 Claim 51. As in claim 1, wherein the implement includes a hopper, for storage of the
229 materials to be introduced into the ground, and the conduit is arranged to conduct
230 the materials from the hopper to the angled blade.

231 Claim 52. As in claim 49, wherein the implement includes press-wheels, one for each
232 angled knife, the press wheels being effective to roll over the soil lifted by the action of
233 the angled knives.

234 Claim 53. Agricultural knife apparatus, which is so structured as to be suitable for
235 inserting materials such as seeds into the ground, wherein:
236 the apparatus is structurally suitable for the operation of creating a slit-opening in the
237 ground and of inserting the materials into the slit-opening, at a depth that is less
238 than about 15 cm vertically below the ground surface;
239 the apparatus includes a shank and a blade, and includes a transition zone, at which
240 the shank and blade are joined integrally;
241 the shank includes a front surface and a rear surface, and left and right side surfaces;
242 when viewed in front elevation, the shank has an axis, termed the shank axis;
243 the blade is formed with an over-surface and an under-surface, which intersect at a
244 line, and the line defines an angled-knife-edge of the blade;
245 the shank axis intersects the line of the angled-knife-edge, at a point of intersection on
246 the angled-knife-edge;
247 when viewed in front elevation, the line of the angled-knife-edge slopes at an angle,
248 termed the knife angle, relative to the shank axis, and the knife angle is between
249 30 and 60 degrees;
250 the angled-knife-edge has a bottom extremity thereof, and the distance, measured
251 along the angled-knife-edge, from the point of intersection to the bottom extremity
252 of the angled-knife-edge, is less than about 30 cm.

253 Claim 54. As in claim 53, wherein the angled-knife-edge is a straight line.

254 Claim 55. As in claim 53, wherein the knife apparatus includes a conduit, which is
255 structurally suitable for depositing seeds in the ground, the conduit being attached

256 to, or supported upon, the blade on a back-side of the blade, which is opposite to
257 and remote from the knife-edge.

258 **Claim 56.** As in claim 53, wherein, in a cross-section of the blade portion taken in a
259 plane at right angles to the knife-edge, the over-surface and the under-surface
260 make an included angle of intersection of between 15 and 30 degrees.

261 **Claim 57.** As in claim 56, wherein the included angle of intersection is the same at
262 cross-sections taken in all planes between the point of intersection and the bottom
263 extremity.

264 **Claim 58.** As in claim 53, wherein the shank includes an attachment means for
265 attaching the knife apparatus to a mounting bar, the attachment means includes
266 two bolt holes, one above the other, in the shank, and the axis of the shank
267 passes through the bolt holes.

268 **Claim 59.** A seeding-knife assembly, comprising a body-member and a replaceable
269 tip-member, wherein:
270 the assembly comprises a knife having an angled blade assembly;
271 the body-member includes a body-over-surface and a body-under-surface, which
272 intersect at a line, and the line defines a body-knife-edge;
273 the tip-member includes a tip-over-surface and a tip-under-surface, which intersect at a
274 line, and the line defines a tip-knife-edge;
275 the shapes of the body-member and the tip-member, and the arrangement of the
276 assembly, are such that:
277 (a) the body-knife-edge terminates at a lower extremity thereof, and the tip-knife-edge
278 terminates at an upper extremity thereof;
279 (b) the lower extremity of the body-knife-edge is contiguous with, and co-linear with,
280 the upper extremity of the tip-knife-edge;
281 (c) the tip-over-surface is a continuation of the plane of the body-over-surface, and the
282 tip-under-surface is a continuation of the plane of the body-under-surface;
283 the body-member, as viewed in cross-section at right angles to the body-knife-edge, is
284 generally triangular in form, the three sides of the triangle being the said body-
285 over-surface, the said body-under-surface, and a body-back-side of the body-

286 member;
287 the tip-member, as viewed in cross-section at right angles to the tip-knife-edge, is
288 generally triangular in form, the three sides of the triangle being the said tip-over-
289 surface, the said tip-under-surface, and a tip-back-side of the tip-member;
290 the triangular form of the body-member is substantially identical to the triangular form
291 of the tip-member;
292 a first one of the members includes a spline, and the other includes a complementary
293 socket;
294 the spline and socket are so complementarily shaped that the tip-member can be
295 engaged on, and disengaged from, the body-member, and, when the tip-member
296 is fully engaged on the body-member, the tip-member is thereby held constrained
297 against all modes of rotational movement of the tip-member relative to the body-
298 member;
299 the assembly includes an operable release means;
300 the release means is effective to hold the tip-member fully engaged on the body-
301 member, and, when operated, is effective to release the tip-member from the
302 body-member.

303 **Claim 60.** As in claim 59, wherein:

304 the spline is a prism having the same general triangular shape as the first-member, but
305 is of a smaller size;
306 the disposition of the spline in the first member is such that a spline-back-side of the
307 triangular form of the spline lies in line with the back-side of the first member;
308 the socket in the second member is complementary to the triangular shape of the
309 spline, and comprises an open-backed hollow chamber of the second member;
310 the socket is positioned centrally within the back side of the second member, the
311 structure of the second member being such that the socket is defined by, and lies
312 between, upper and lower cheeks of the second member;
313 the disposition of the members is such that the upper and lower cheeks of the second
314 member overlie the spline, respectively above and below, when the tip-member is
315 fully engaged in the body-member.

316 **Claim 61.** As in claim 60, wherein the release means includes a pin, and includes a
317 pin-receiving-hole through at least one of the cheeks of the second member, and

318 through the spline of the first member, and includes a means for retaining the pin
319 in the pin-receiving-hole during operation.

320 **Claim 62.** As in claim 59, wherein the first member is the body-member.

321 **Claim 63.** As in claim 59, wherein:
322 the implement includes a conduit for conducting seeds to the knife assembly;
323 the conduit is secured to the body-member, and is located at the body-back-side
324 thereof;
325 the conduit continues down from the body-back-side, and extends down the spline-
326 back-side;
327 a discharge mouth of the conduit is located at a lowermost extremity of the spline-
328 back-side.

329 **Claim 64.** As in claim 59, wherein the lower extremity of the body-knife-edge the knife
330 is rounded to a substantial radius in a convex sense, and the upper extremity of
331 the tip-knife-edge includes a tag, which is rounded complementarily in a concave
332 sense.

333 **Claim 65.** As in claim 59, wherein the body-knife-edge is sharp, having a radius of
334 less than about 0.5 mm, and the tip-knife-edge is more blunt, having a radius of
335 about 2 mm or more.

336 **Claim 66.** As in claim 59, wherein:
337 the replaceable tip-member includes a wing-extension;
338 the wing-extension is formed with an over-surface and an under-surface, which
339 intersect at a line, and the line defines a wing-knife-edge of the wing-extension;
340 the tip-member includes a wing-mounting-means, which is effective to so mount the
341 wing-extension in relation to the tip-member that:
342 (a) the tip-knife-edge and the wing-knife-edge meet contiguously, at a point at the
343 bottom of the tip-knife-edge;
344 (b) the wing-knife-edge extends at a substantial angle to the blade-knife-edge
345 from the said point.

346 **Claim 67.** The replaceable tip of the assembly of claim 59, as a separate component.

347 **Claim 68.** A procedure for planting seeds in the ground, comprising:
348 creating a slit-opening in the ground, by drawing a knife blade, having a knife-edge,
349 through the ground;
350 simultaneously depositing the seeds in the slit opening, right behind the angled knife
351 blade;
352 maintaining the angled knife blade at a depth of no more than about 15 cm vertically
353 down into the ground;
354 while the knife blade is being drawn through the ground, maintaining the knife-edge at
355 an angle relative to the ground;
356 wherein:
357 in front view relative to the direction in which the knife blade is drawn, the knife
358 blade makes an angle relative to the ground, termed the side-slope-angle, of
359 between 30 and 60 deg to the horizontal,
360 in lateral elevation, the knife-edge makes an angle to the horizontal, termed the
361 forward-pitch-angle, of between 30 and 60 degrees, and the blade slopes
362 forwards in that view, in that deeper portions of the knife-edge in the ground lie
363 ahead of more shallow portions of the knife-edge.

09633847 073400

defined with respect only to the knife unit itself, independently of the implement. In this case, the definition makes use of the shank of the knife, and of the axis of the shank. When the shank is provided with two bolts, one above the other, for attachment to the mounting bar, the shank axis (in a frontal view of the shank) is the line that runs through the bolts. However, even if the shank is mounted by means other than two bolts vertically in-line, the shank still has an axis, which can be determined by the geometry of the shank in a particular case. The major features of the invention, that the blade lies at an angle to the shank in front view, and the shallow depth of the blade, are present in this definition.

As mentioned above, sometimes the conventional vertical knife seeders have included, as an accessory, a means for providing a side ledge to the vertical trench. As mentioned, grains of fertiliser are deposited on or in this side ledge, whereby the fertiliser can be kept spaced apart from the seeds. The fertiliser rests on the ledge, while the seeds fall down to the bottom of the vertical trench.

An example of such a vertical-knife-with-side-ledge structure is depicted in Canadian patent publication CA-2,099,555 (Henry, 1995). Henry's structure includes first a conventional vertical knife-blade 25, for cutting a vertical slit in the ground, with the associated delivery pipe for depositing seeds at the bottom of the vertical slit. Henry also shows a ledge-cutting accessory 28. The accessory 28 is fixed to the back of the vertical knife-blade 25. Thus, in the design as depicted in Figs 5a,5b of Henry, two injectors are shown: one for injecting seeds, and the other for injecting fertiliser.

Regarding Henry's vertical knife-blade cutter / seed injector: when viewed from the side (Fig 5a), Henry's knife blade 25 is angled, such that the bottom extremity of the knife-blade leads the rest of the knife-blade as the knife-blade travels through the ground. It is conventional, and very common, for vertical seeding-trench knife-blades to be angled forwards, i.e bottom-edge leading. In the front view (Fig 5b), Henry's knife-blade 25 is not angled at all.

Regarding Henry's side-ledge cutter / fertiliser-injector: when viewed from the side (Fig 5a), Henry's ledge-cutter 28 is so angled as to be "bottom-edge trailing". That is to say, the bottom extremity of the ledge-cutter lags, or trails, as the ledge-cutter travels through the ground. In the front view (Fig 5b), Henry's ledge-cutter 28 makes an angle to the horizontal of about 45 degrees.

Neither of the blades or cutters of Henry will achieve the "gentle up-and-over" effect, which is the aim of the present invention. This is because neither of the blades or cutters of Henry has an over-surface and an under-surface, which meet at a line, where the line defines the leading knife edge of the blade, and where the knife edge, thus defined, has a side-slope angle of between 30 degrees and 60 degrees.

Claims, as presented for PCT Entry into USA

Claim 69. An agricultural implement, which is so structured as to be suitable for inserting granular materials into the ground, wherein:

the implement is structurally suitable for the operation of creating a slit-opening in the ground and of inserting the materials into the slit-opening;

the implement includes a knife having an angled blade;

the implement includes a drawing means, for drawing the angled blade through the ground in a forwards direction;

the angled blade is effective, when drawn through the ground, to create an angled slit-opening in the ground;

the implement includes a conduit for conducting the materials to the angled blade;

the conduit is secured to the angled blade, and is so positioned thereon that, during operation, a discharge mouth of the conduit is located in the ground at a depth below the ground surface, and is so located in relation to the angled blade as to deposit the materials directly behind the angled blade, in the slit-opening created by the angled blade, as the knife is drawn through the ground;

the angled blade is formed with an over-surface and an under-surface, which intersect at a line, and the line defines a knife-edge of the blade;

the implement includes a knife-mounting means;

the knife-mounting means is effective to mount the angled blade at such an orientation and disposition in relation to the ground, during operation of the implement, that:

(a) when viewed from the forwards direction, the knife-edge makes an angle to the horizontal, termed the side-slope-angle, of between 30 and 60 degrees;

and

(b) the angled blade extends down into the ground to a blade-depth of no more than about 15 cm, measured vertically down from the ground surface;

the blade is so mounted that, at a vertical cross-section of the blade, taken below the ground surface, substantially no point in or on the blade at that vertical cross-section is vertically lower in the ground than the knife-edge at that vertical cross-section;

the over-surface of the blade is so angled that, when the blade is drawn through the

33 ground, ground-soil in the path of the over-surface is lifted upwards thereby;
34 and the knife-edge is smooth and uninterrupted, in the sense that there is
35 substantially nothing on the knife-edge that would snag soil and debris passing
36 upwards along the knife-edge, during operation.

37 **Claim 70.** As in claim 69, wherein:

38 the over-surface of the blade includes an upper-edge-surface, which is a portion of
39 the over-surface that:

40 (a) is contiguous with the knife-edge;

41 (b) lies between the knife-edge and a line drawn on the over-surface parallel to
42 the knife-edge and 4 cm back from the knife-edge; and

43 (c) lies between the bottom extremity of the knife-edge and the ground surface;
44 the upper-edge-surface is a unitary flat plane;
45 the knife-mounting means is effective to mount the angled blade at such an
46 orientation and disposition of the knife in relation to the ground that a normal to
47 the upper-edge-surface points upwards relative to the horizontal.

48 **Claim 71.** As in claim 69, wherein, when viewed in cross-section of the blade

49 taken in a plane at right angles to the knife-edge, the upper-edge-surface of the
50 blade lies at an angle, termed the wedge-angle of the upper-edge-surface of the
51 blade, of between 14 and 45 degrees, and preferably between 20 and 30 degrees
52 to the horizontal;

53 and the wedge-angle of the upper-edge-surface of the blade is substantially constant
54 over a substantial area of the blade, being an area of the blade below the ground
55 surface.

56 **Claim 72.** As in claim 69, wherein:

57 the blade, as viewed in cross-section at right angles to the knife-edge, is generally
58 triangular in shape, the three sides of the triangle being the said over-surface,
59 the said under-surface, and a back-side of the blade.

60 **Claim 73.** As in claim 72, wherein the triangle is the same, as to size, shape, and

orientation, at substantially all below-ground cross-sections at right angles to the knife-edge.

Claim 74. As in claim 72, wherein, over at least the portion of the blade that lies below ground during operation, the conduit is structurally integrated into, or supported upon, the back-side of the blade.

Claim 75. As in claim 69, wherein the knife-mounting means is effective to mount the angled blade at such an orientation and disposition in relation to the ground, during operation of the implement, that:
when viewed in lateral or side elevation, during operation, the knife-edge makes an angle to the horizontal, termed the forward-pitch-angle, of between 30 and 60 degrees;
the blade slopes forwards in that view, whereby deeper portions of the knife-edge in the ground lie ahead of more shallow portions of the knife-edge.

Claim 76. As in claim 69, wherein:
the knife includes an in-ground blade portion, an above-ground shank portion, and an at-ground-surface transition portion;
the general shape and disposition of the portions of the knife is such that, during operation thereof, soil and debris travelling up the knife-edge towards, and out of, the ground surface is deflected aside from the shank portion;
the above-ground shank portion includes a front surface and a rear surface, and left and right side surfaces, and the disposition of the knife is such that, during operation, soil debris travelling up the knife-edge towards the ground surface encounters the deflector-surface upon reaching the ground surface, and is deflected aside by same, and is thereby deflected clear of the front surface of the above-ground shank portion of the knife, and is deflected by same downwards and is thereby at least somewhat inhibited from flying into the air.

Claim 77. As in claim 69, wherein:
a frame of the implement includes a seeding-knife-mounting bar;

007E20748E2960

89 the knife is formed with an above-ground shank-portion, and the knife mounting
90 means includes an operable attachment means whereby the knife can be
91 detachably attached to the seeding-knife-mounting bar;
92 and the conduit is so positioned in relation to the shank-portion as to allow access
93 for operation of the attachment means.

94 **Claim 78.** As in claim 69, wherein the implement includes a seeding hose, of
95 flexible material, and the conduit includes a port, for attachment thereto of the
96 flexible seeding hose.

97 **Claim 79.** As in claim 69, wherein:
98 the knife includes a wing-extension;
99 the wing-extension is formed with an over-surface and an under-surface, which
100 intersect at a line, and the line defines a wing-knife-edge of the wing-extension;
101 the knife includes a wing-mounting-means, which is effective to so mount the wing-
102 extension in relation to the angled blade that:
103 (a) the knife-edge of the blade and the wing-knife-edge meet contiguously, at a
104 point at the bottom of the knife-edge of the blade;
105 (b) the wing-knife-edge extends substantially horizontally from the said point;
106 (c) and the blade is so mounted that, at any vertical cross-section of the wing-
107 extension, substantially no point in or on the wing-extension at that vertical
108 cross-section is vertically lower in the ground than the wing-knife-edge at
109 that vertical cross-section.

110 **Claim 80.** As in claim 69, wherein:
111 the angled blade includes a promontory, which is effective, when the blade is drawn
112 through the ground, to cut a side ledge in the slit-opening;
113 the implement includes a second conduit for conducting a second granular material
114 to the angled blade;
115 the second conduit is secured to the angled blade, and is so positioned thereon that;
116 during operation, a discharge mouth of the second conduit is located in the
117 ground at a depth below the ground surface, and is so located in relation to the

118 angled blade as to deposit the second material directly behind the promontory,
119 and onto the side ledge, as the knife is drawn through the ground;
120 the slit opening as cut by the angled knife blade, and the disposition of the discharge
121 mouth of the conduit, are such that the material discharged from the conduit
122 falls to the bottom of the slit opening;
123 the side ledge as cut by the promontory, and the disposition of the second conduit,
124 are such that the second material discharged from the second conduit falls onto
125 the side ledge.

126 **Claim 81.** As in claim 69, wherein:

127 a large number of the said knives are mounted on the implement, each angled blade
128 being so mounted as to be oriented and disposed each in the manner as defined
129 in claim 69;

130 the implement includes press-wheels, one for each angled knife, the press wheels
131 being effective to roll over the soil lifted by the action of the angled knives.

Claim 82. An agricultural knife apparatus, which is so structured as to be suitable for inserting granular materials into the ground, wherein:
the knife apparatus is structurally suitable for the operation of creating a slit-opening in the ground and of inserting the materials into the slit-opening;
the apparatus includes a shank and a blade, and includes a transition zone, at which the shank and blade are joined integrally;
the shank includes a front surface and a rear surface, and left and right side surfaces;
when viewed in front elevation, the shank has an axis, termed the shank axis;
the blade is formed with an over-surface and an under-surface, which intersect at a line, and the line defines an angled-knife-edge of the blade;
the shank axis intersects the line of the angled-knife-edge, at a point of intersection on the angled-knife-edge;
when viewed in front elevation, the line of the angled-knife-edge slopes at an angle, termed the knife angle, relative to the shank axis, and the knife angle is between 30 and 60 degrees;

148 the angled-knife-edge has a bottom extremity thereof, and the distance, measured
149 along the angled-knife-edge, from the point of intersection to the bottom
150 extremity of the angled-knife-edge, is less than about 30 cm;
151 the apparatus includes a conduit, for depositing the granular material in the ground,
152 the conduit being attached to, or supported upon, the blade on a back-side of the
153 blade, which is opposite to and remote from the knife-edge.

154 **Claim 83.** As in claim 82, wherein, in a cross-section of the blade portion taken in
155 a plane at right angles to the knife-edge, the over-surface and the under-surface
156 make an included angle of intersection of between 15 and 30 degrees.

157 **Claim 84.** As in claim 82, wherein the shank includes an attachment means for
158 attaching the knife apparatus to a mounting bar, the attachment means includes
159 two bolt holes, one above the other, in the shank, and the axis of the shank
160 passes through the bolt holes.

161 **Claim 85.** An agricultural knife assembly, which is so structured as to be suitable
162 for inserting granular materials into the ground, wherein:
163 the knife assembly is structurally suitable for the operations of creating a slit-
164 opening in the ground and of inserting the materials into the slit-opening;
165 the knife assembly comprises a body-member and a replaceable tip-member;
166 the assembly comprises a knife having an angled blade assembly;
167 the body-member includes a body-over-surface and a body-under-surface, which
168 intersect at a line, and the line defines a body-knife-edge;
169 the tip-member includes a tip-over-surface and a tip-under-surface, which intersect
170 at a line, and the line defines a tip-knife-edge;
171 the shapes of the body-member and the tip-member, and the arrangement of the
172 assembly, are such that:
173 (a) the body-knife-edge terminates at a lower extremity thereof, and the tip-knife-
174 edge terminates at an upper extremity thereof;
175 (b) the lower extremity of the body-knife-edge is contiguous with, and co-linear
176 with, the upper extremity of the tip-knife-edge;

177 (c) the tip-over-surface is a continuation of the plane of the body-over-surface, and
178 the tip-under-surface is a continuation of the plane of the body-under-surface;
179 the body-member, as viewed in cross-section at right angles to the body-knife-edge,
180 is generally triangular in form, the three sides of the triangle being the said
181 body-over-surface, the said body-under-surface, and a body-back-side of the
182 body-member;
183 the tip-member, as viewed in cross-section at right angles to the tip-knife-edge, is
184 generally triangular in form, the three sides of the triangle being the said tip-
185 over-surface, the said tip-under-surface, and a tip-back-side of the tip-member;
186 a first one of the members includes a spline, and the other includes a
187 complementary socket;
188 the spline and socket are so complementarily shaped that the tip-member can be
189 engaged on, and disengaged from, the body-member, and, when the tip-member
190 is fully engaged on the body-member, the tip-member is thereby held
191 constrained against all modes of rotational movement of the tip-member relative
192 to the body-member;
193 the assembly includes an operable release means;
194 the release means is effective to hold the tip-member fully engaged on the body-
195 member, and, when operated, is effective to release the tip-member from the
196 body-member.

197 **Claim 86.** As in claim 85, wherein:

198 the spline is a prism having the same general triangular shape as the first-member,
199 but is of a smaller size;
200 the disposition of the spline in the first member is such that a spline-back-side of the
201 triangular form of the spline lies in line with the back-side of the first member;
202 the socket in the second member is complementary to the triangular shape of the
203 spline, and comprises an open-backed hollow chamber of the second member;
204 the socket is positioned centrally within the back side of the second member, the
205 structure of the second member being such that the socket is defined by, and lies
206 between, upper and lower cheeks of the second member;
207 the disposition of the members is such that the upper and lower cheeks of the second

208 member overlies the spline, respectively above and below, when the tip-member
209 is fully engaged in the body-member.

210 **Claim 87.** As in claim 85, in association with an agricultural implement, wherein:
211 the implement includes a conduit for conducting seeds to the knife assembly;
212 the conduit is secured to the body-member, and is located at the body-back-side
213 thereof;
214 the conduit continues down from the body-back-side, and extends down the spline-
215 back-side;
216 a discharge mouth of the conduit is located at a lowermost extremity of the spline-
217 back-side.

218 **Claim 88.** A procedure for inserting granular material into the ground,
219 comprising:
220 creating a slit-opening in the ground, by drawing a knife blade, having a knife-
221 edge, through the ground;
222 simultaneously depositing the material in the slit opening, right behind the angled
223 knife blade;
224 maintaining the angled knife blade at a depth of no more than about 15 cm
225 vertically down into the ground;
226 while the knife blade is being drawn through the ground, maintaining the knife-edge
227 at an angle relative to the ground;
228 wherein:
229 in front view relative to the direction in which the knife blade is drawn, the
230 knife blade makes an angle relative to the ground, termed the side-slope-
231 angle, of between 30 and 60 deg to the horizontal,
232 in lateral elevation, the knife-edge makes an angle to the horizontal, termed the
233 forward-pitch-angle, of between 30 and 60 degrees, and the blade slopes
234 forwards in that view, in that deeper portions of the knife-edge in the ground
235 lie ahead of more shallow portions of the knife-edge.

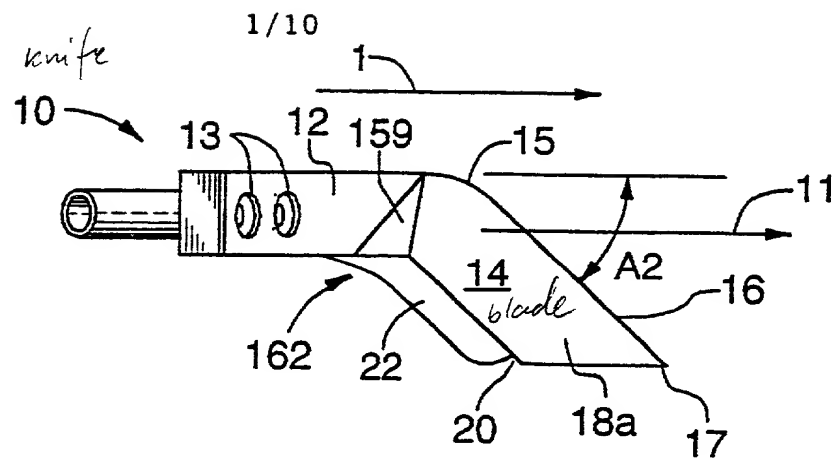


FIG. 1

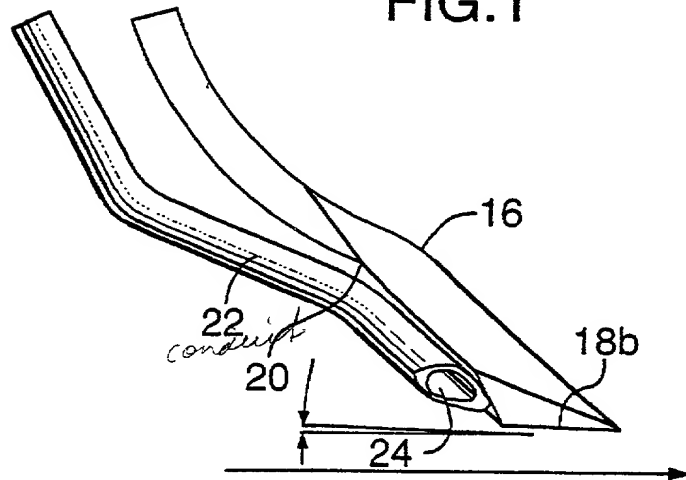


FIG. 2

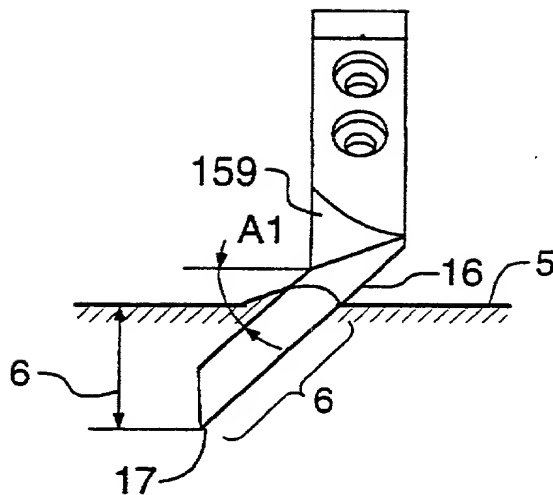


FIG. 3

APT 34 AMDT

PCT / GA 99 / 00073

17 MARCH 1999 (17 MAR 99)
09/623547

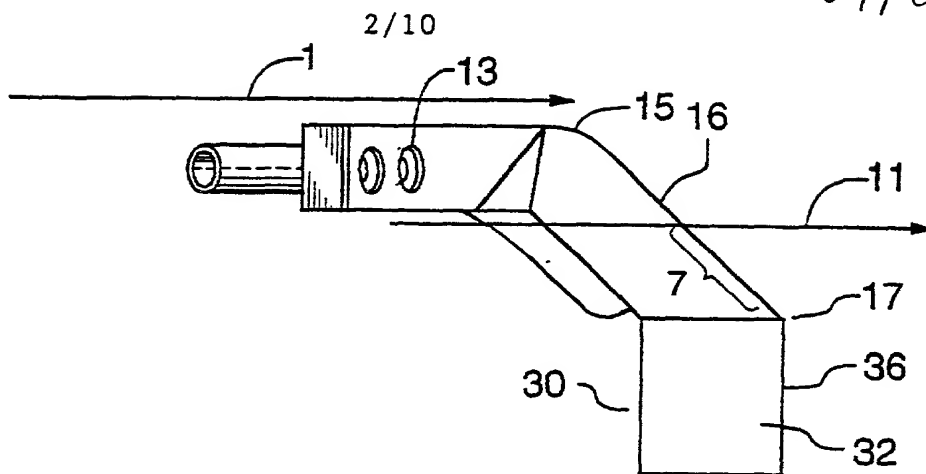


FIG. 4

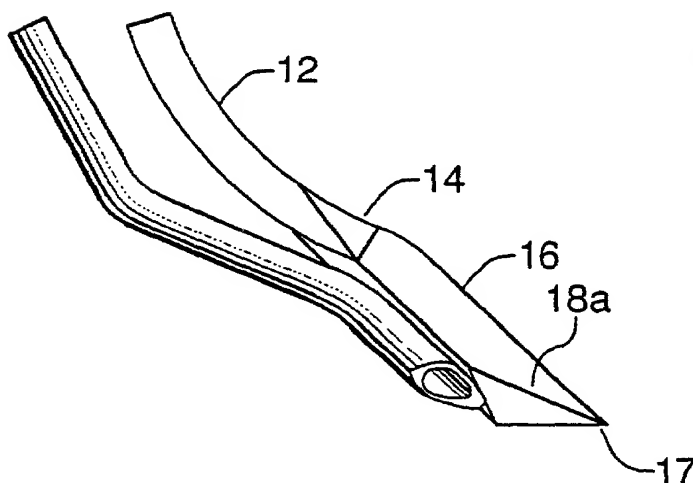


FIG. 5

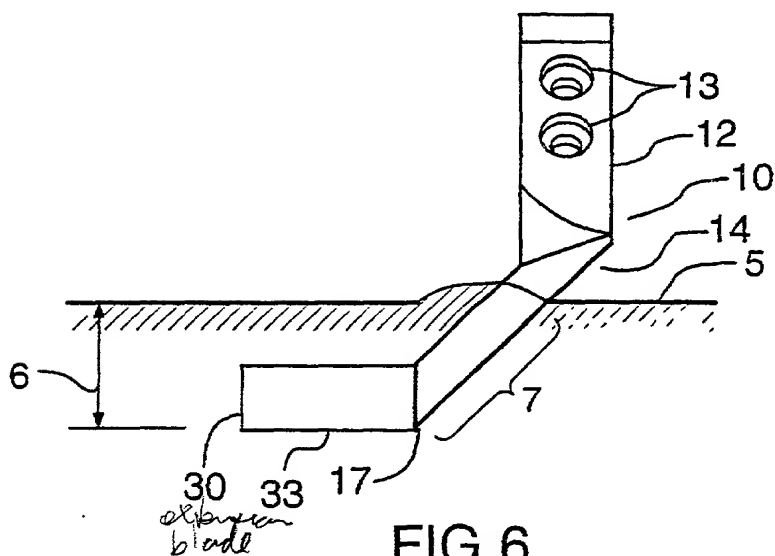


FIG. 6

ART 34 ANDT

17 MARCH 1999 (17.03.99)
09/623847

3/10

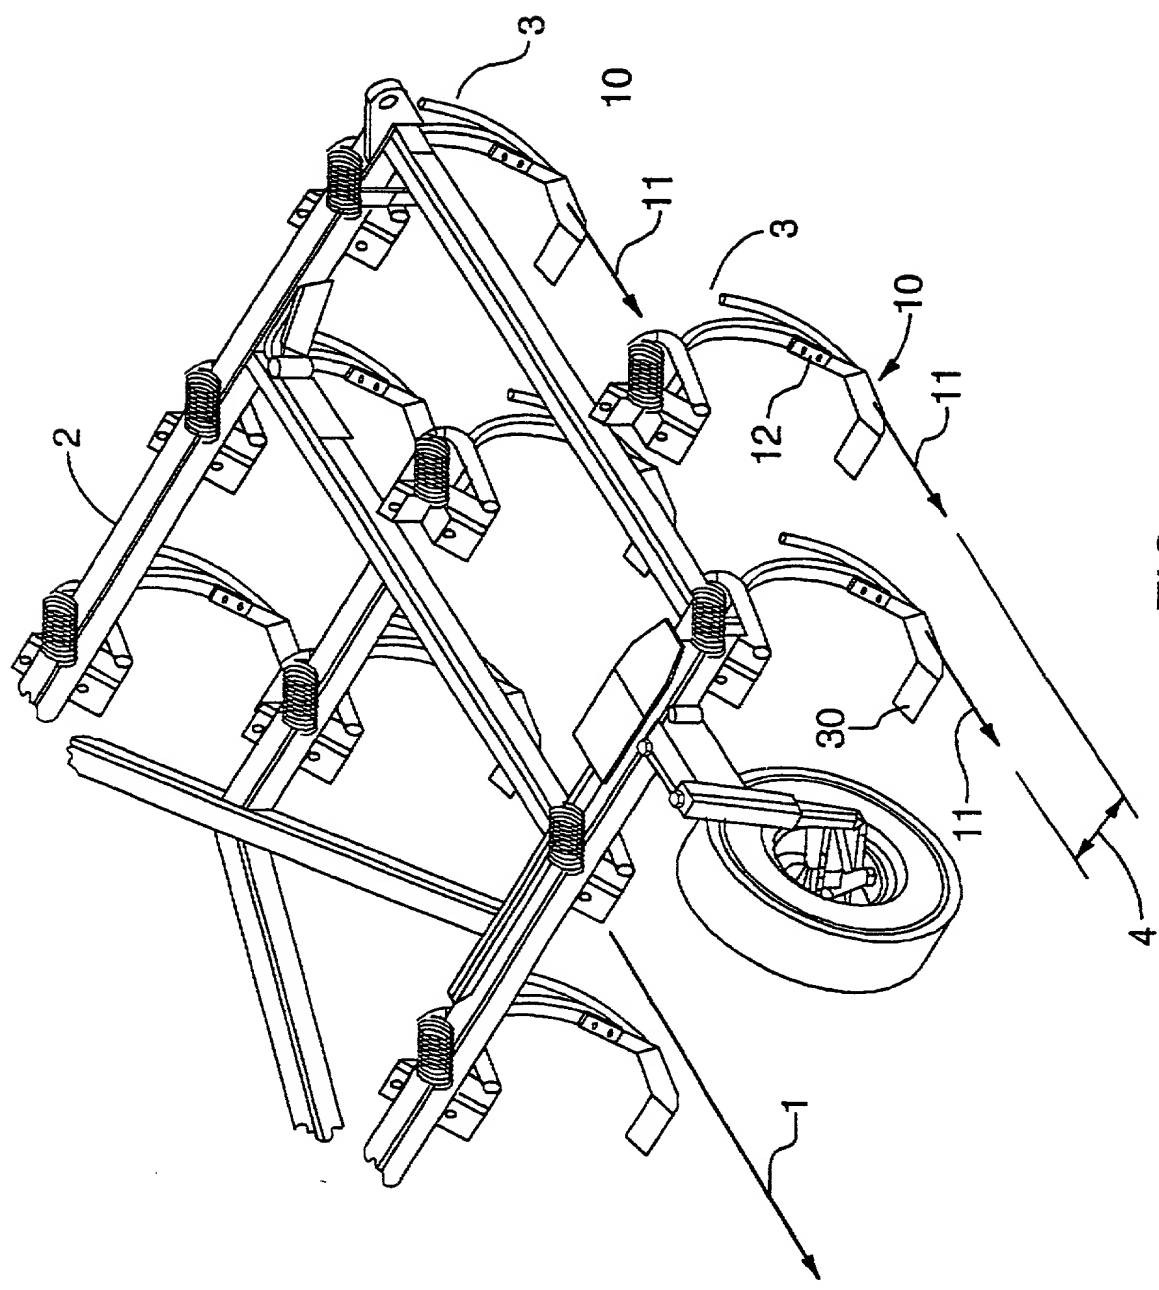


FIG.7




007E20 448E2960

APT 34 AMPT

PCT / CA 99 / 00073

17 MARCH 1999

09/623847
17.03.99

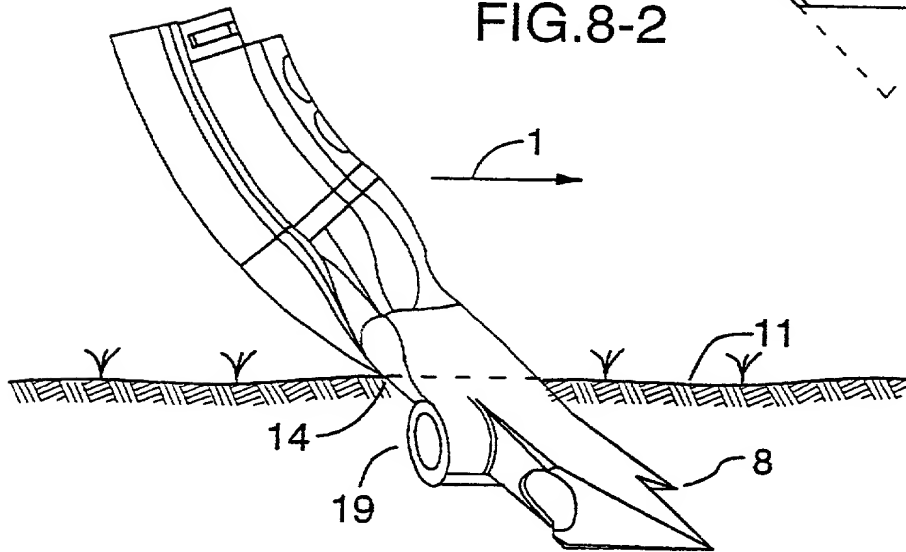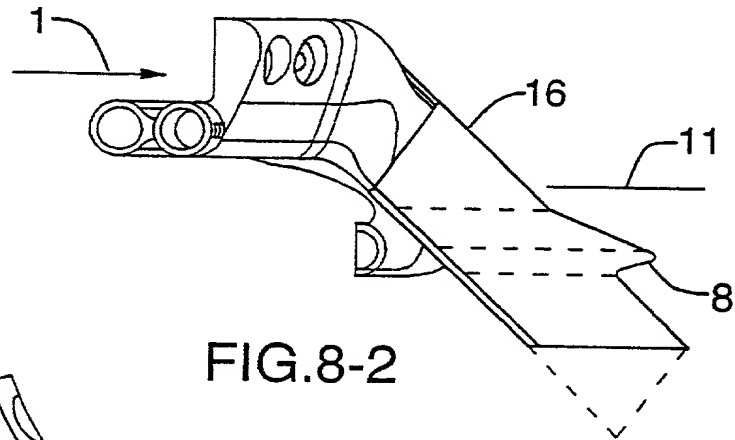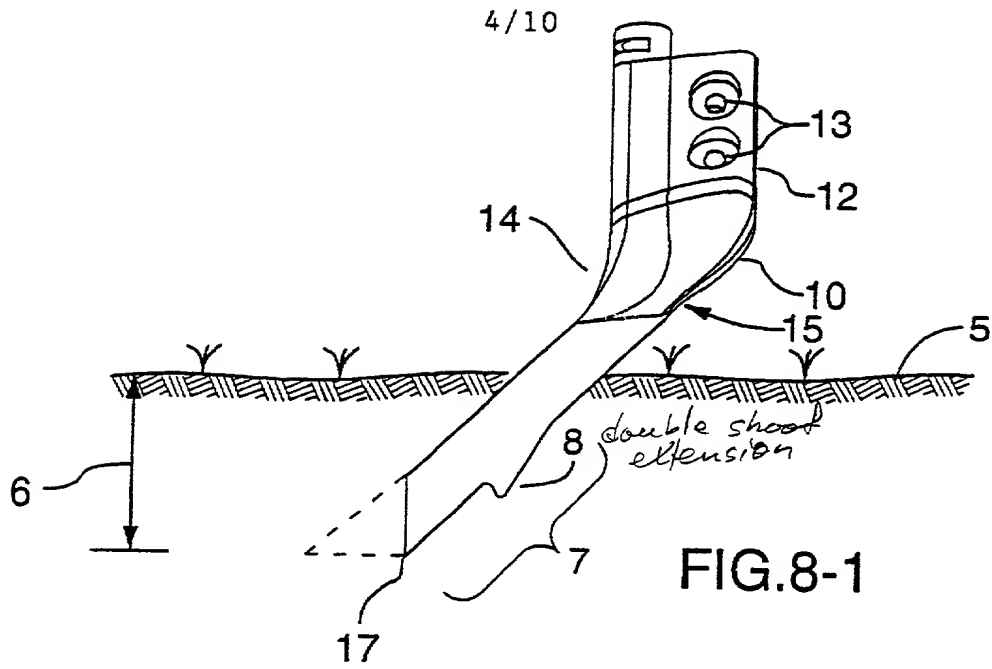

APR 34 AIDF

17 MARCH 1999 (17.03.99)

09/623847

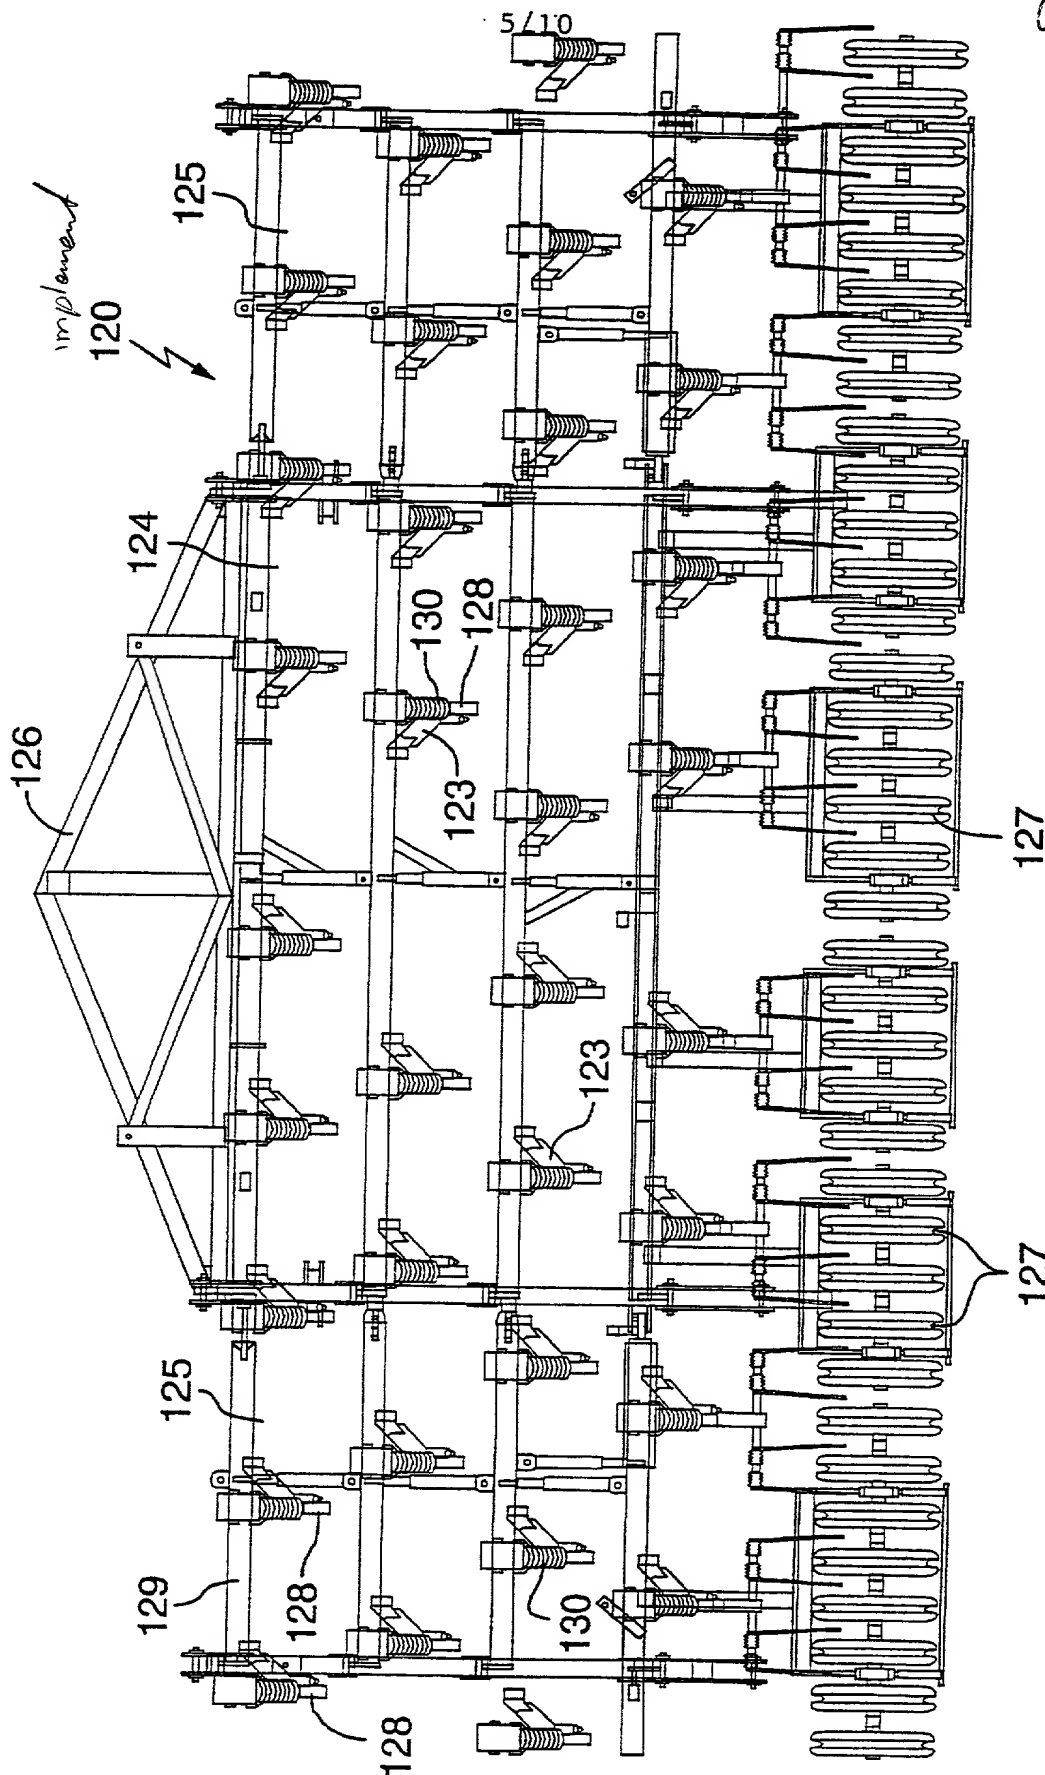


FIG. 9

NOTE 20 24BEE2960

17 MARCH

1999 (17.03.99)

PG 1 / GR 99 / 000013
09/623847

6/10

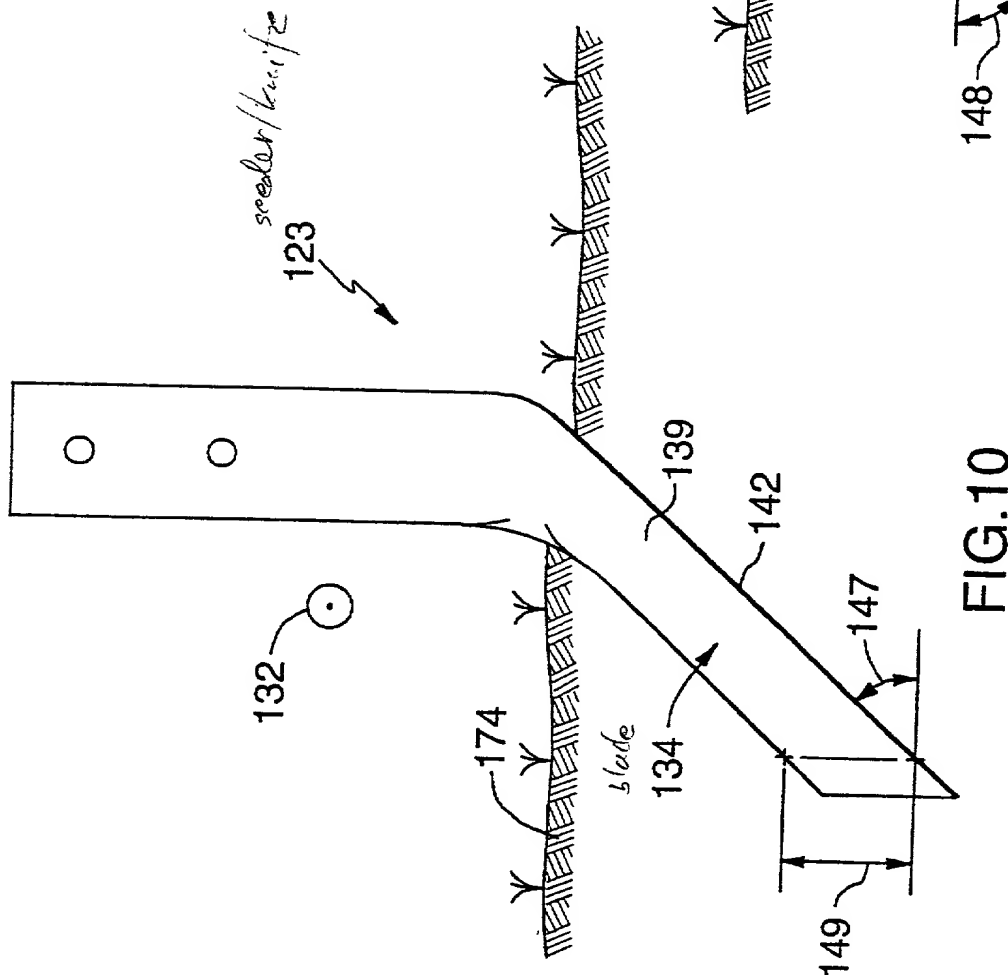


FIG. 10

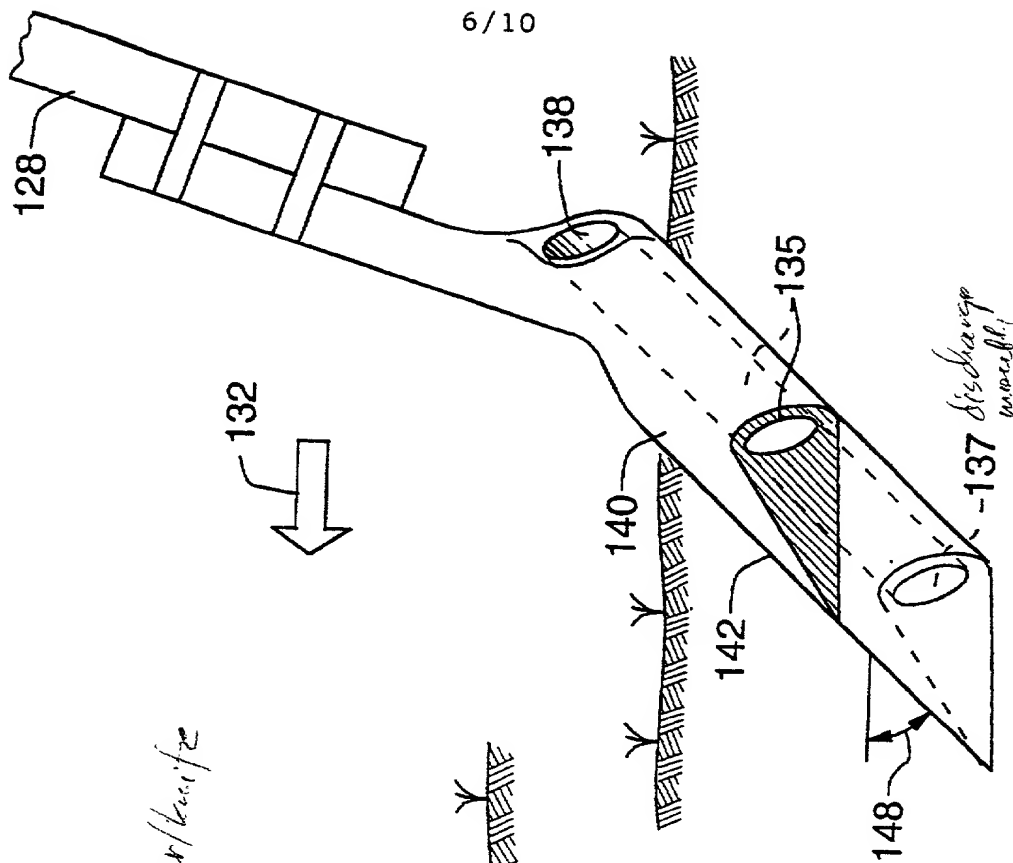


FIG. 11

ART 34 AND

17 MARCH 1999 (17.03.99)
09/623847

7/10

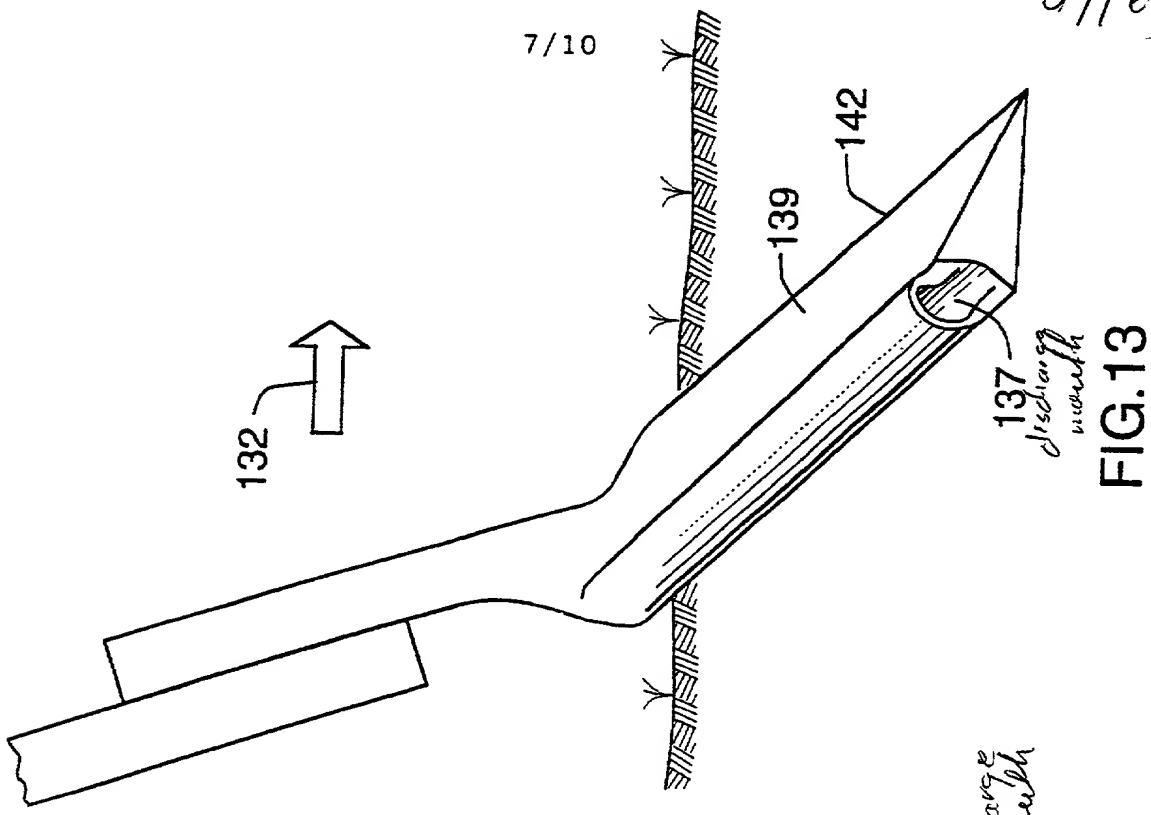


FIG. 13

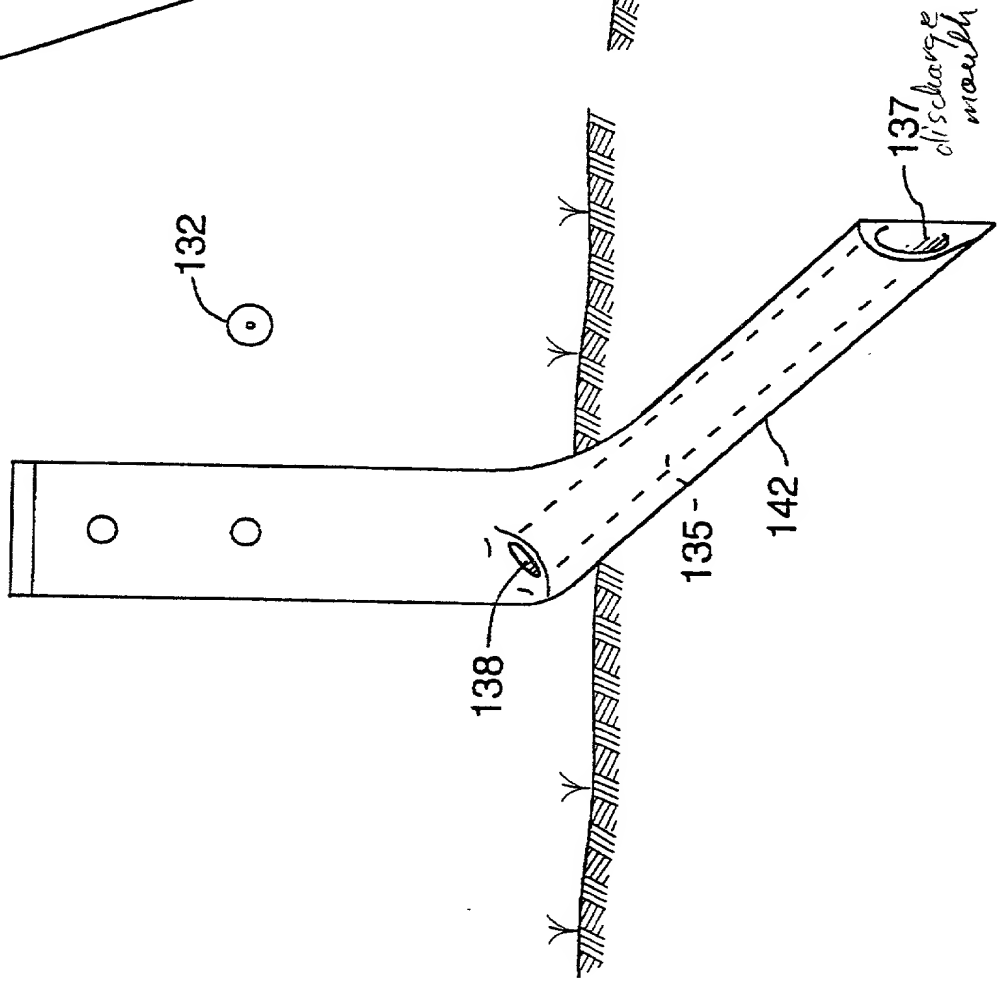


FIG. 12

NOTE: 4822960

ART 34 AND

PCT / CA 99 / 00075

17 MARCH 1999

09/623847
(17.03.99)

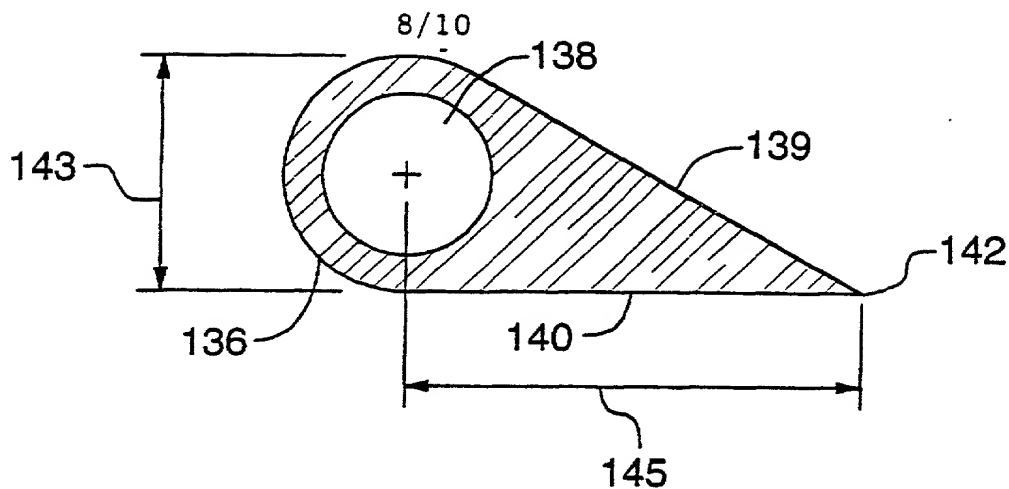


FIG. 14

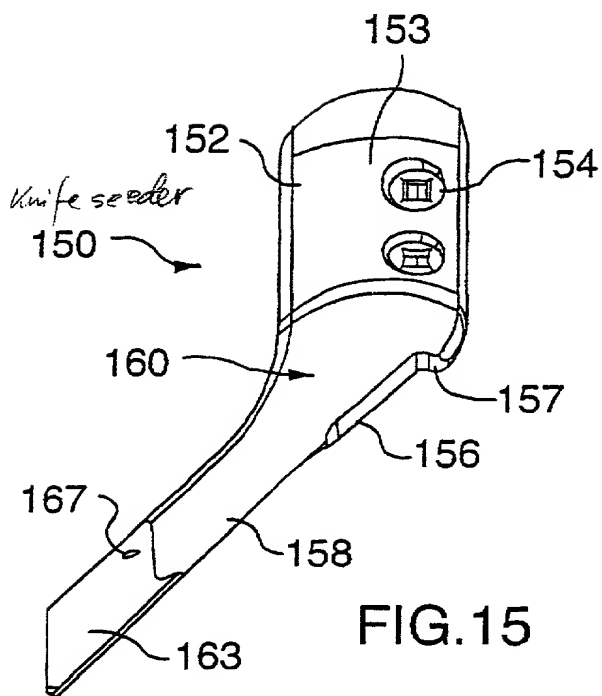


FIG. 15



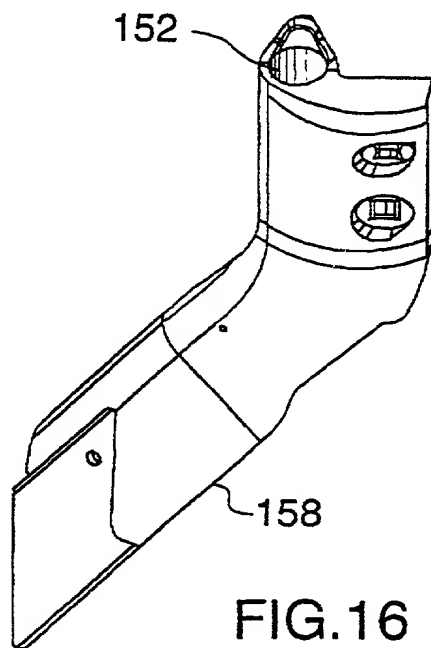


FIG. 16

APR 34 1999

17 MARCH 1999 (17.03.99)
09/623847

9/10

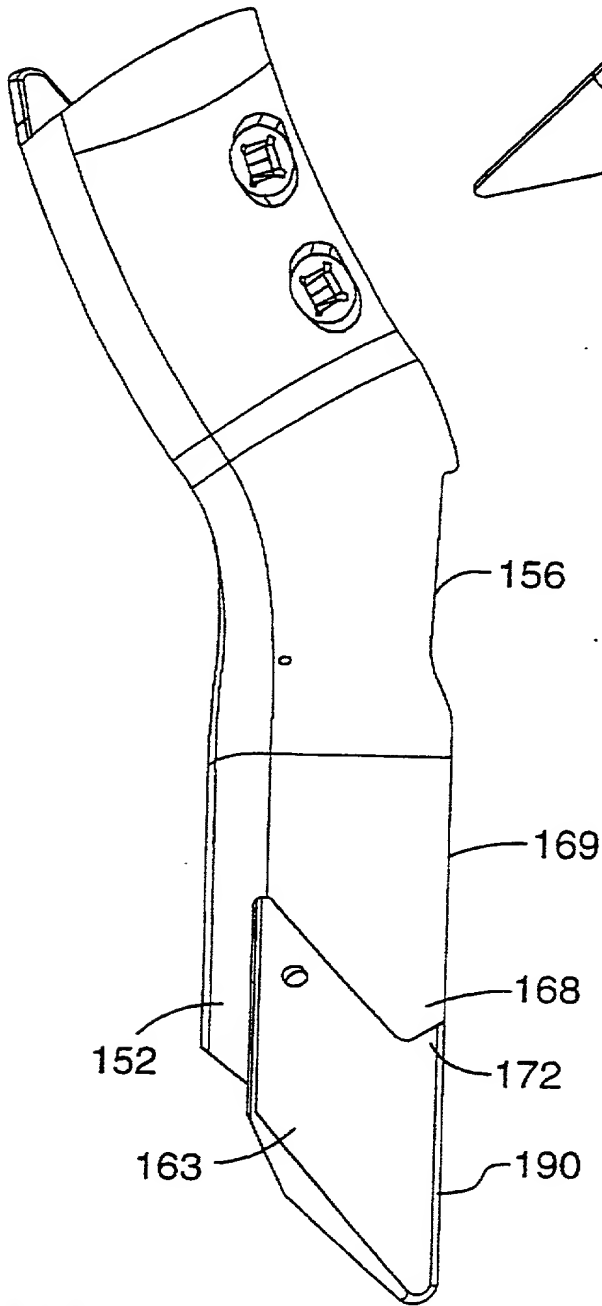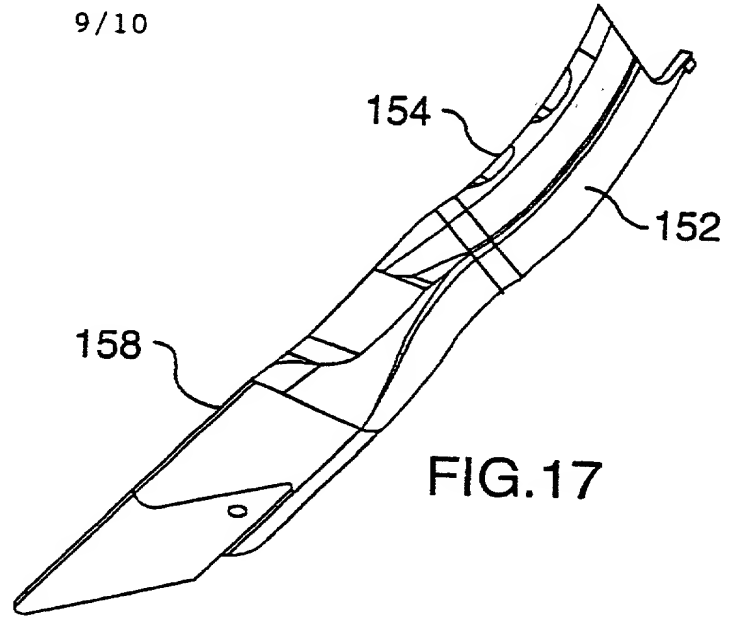

Printed: 12-11-1999

BNSDOCID: <E2 990007303>

SUBSTITUTE SHEET

10/10

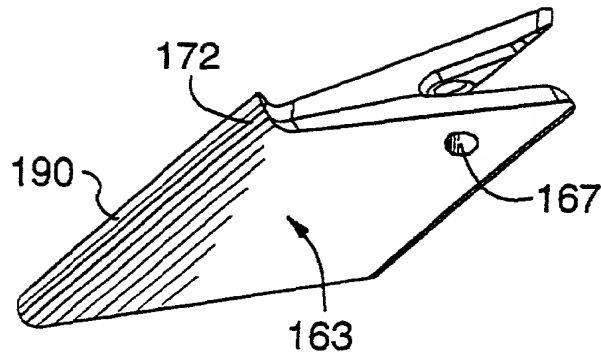


FIG.19

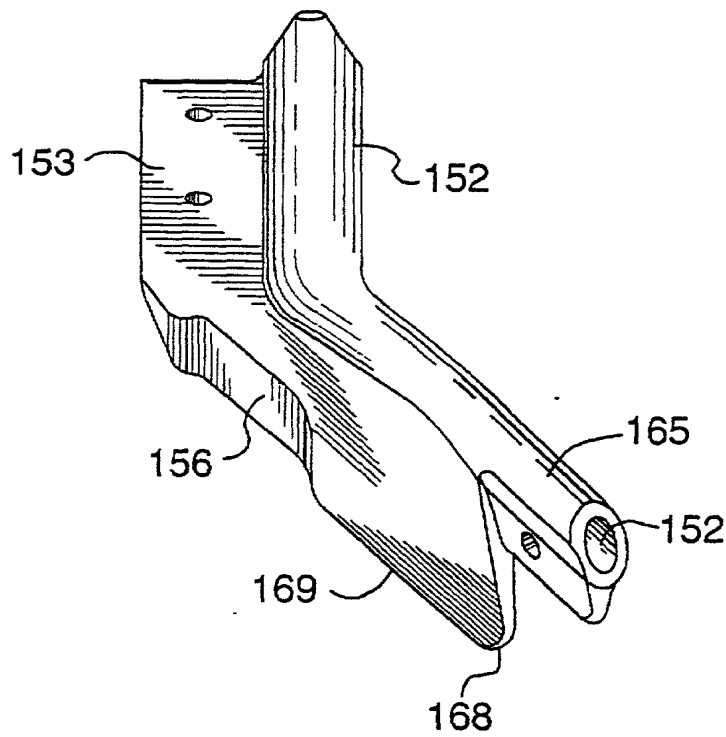


FIG.20

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION FOR UTILITY OR
DESIGN
PATENT APPLICATION
(37 CFR 1.63)**☐ Declaration Submitted with Initial Filing
OR
☐ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

Attorney Docket Number	801-49US
First Named Inventor	SUMMACH, T E
COMPLETE IF KNOWN	
Application Number	/
Filing Date	
Group Art Unit	
Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

MINIMUM TILL SEEDING KNIFE

the specification of which (Title of the invention)

☐ is attached hereto
OR☒ was filed on (MM/DD/YYYY) 05 Feb 1999 as United States Application Number or PCT International

Application Number CA99/00073 and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
9802413.6	Britain (GB)	5 Feb 1998	<input type="checkbox"/>	YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(a) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.
PCT/CA99/00073	February 5, 1999	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT International application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
PCT/CA99/00073	Feb 5, 1999	

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: ☒ Customer Number 23716

☒ Customer Number **23716** →

☐ OR

☐ Registered practitioner(s) name/registration number listed below



Registered trademark(s) name(s)			Registration Number
Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.


Direct all correspondence to: ☒ Customer Number 23716 *OR* ☐ Correspondence address below

Name					
Address					
Address					
City		State		ZIP	
Country		Telephone		Fax	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.


Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any)) <u>Terry Emerson</u>					Family Name or Surname <u>SUMMACH</u>				
Inventor's Signature 					Date <u>JUN 27 2000</u>				
Residence: City <u>Saskatoon</u>		State <u>SK</u>		Country <u>Canada</u>		Citizenship <u>CA</u>			
Post Office Address <u>313 Capilano Place</u>									
Post Office Address 									
City <u>Saskatoon</u>		State <u>SK</u>		ZIP <u>S7K 4J7</u>		Country <u>Canada</u>			
<input checked="" type="checkbox"/> Additional Inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto									

☒ Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

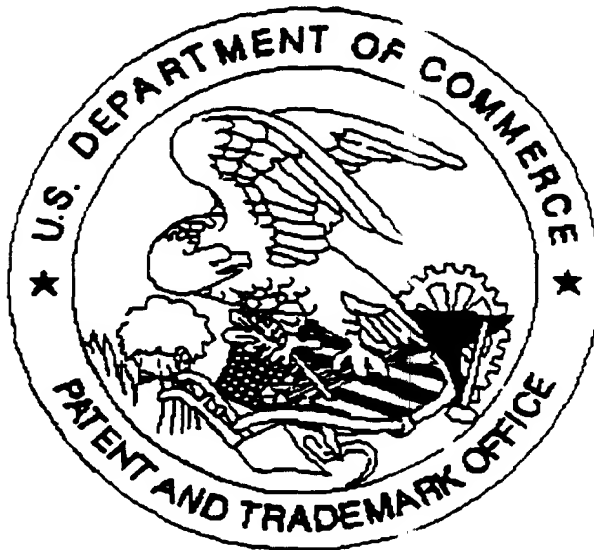

Application deficiencies found during scanning:

☒ Page(s) _____ of Preliminary / Amendment were not present
for scanning. (Document title)

☒ Page(s) _____ of Abstract were not present
for scanning. (Document title)

☒ Scanned copy is best available. Drawings are dark

SCANNED # 2